


# Address

Wall Mounted

DESCRIPTION

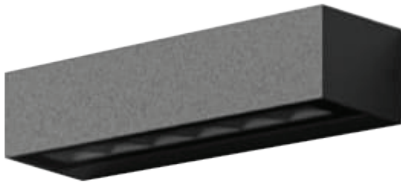

The Address is a robust wall luminaire with a shielded light source that is optionally available with light emission on one or two sides. Such kind of luminaire is suitable for many applications around the house & in public areas.



LED Chip



Illumination Data

Color temprature:	3000K   4000K
Lumen output:	1200 LM
CRI	80
Beam angle	2x95° Flood

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Glass
Optics	Tempered
	With optical structure
Ingress protection (IP)	65
Impact Protection (IK)	07

Electric Characteristics

Light source	LED Built in
LED type	SMD
Power	11 Watt
P.F	>0.9
LED chip	Cree
Driver	Integrated

Installation


Installation	Surface Wall Mounted
Wiring	Product complete with electronic components

Luminaire Body Finish Color

White Ral 9003	
Grey Ral 9006	
Black Ral 9005	

Certificate & Warranty


Certification	CB   CE   LM79   LM80
	TM21   Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



# Address

Wall Mounted

## Dimensions & Specs

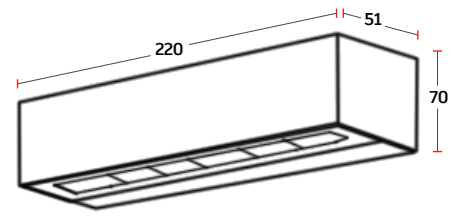

\*All dimensions in these sketches are in millimeters\*

## Dimnesions & specs of luminaires

Dim	Length	Width	Height
1	220mm	51mm	70mm


## Specs

Wattage (W)	lumen (lm)
11 watt	1200lm

\*All dimensions in this schedule table are in millimeters\*


## Product coding system

BR - AD C XX.8 XX F 65 X - X

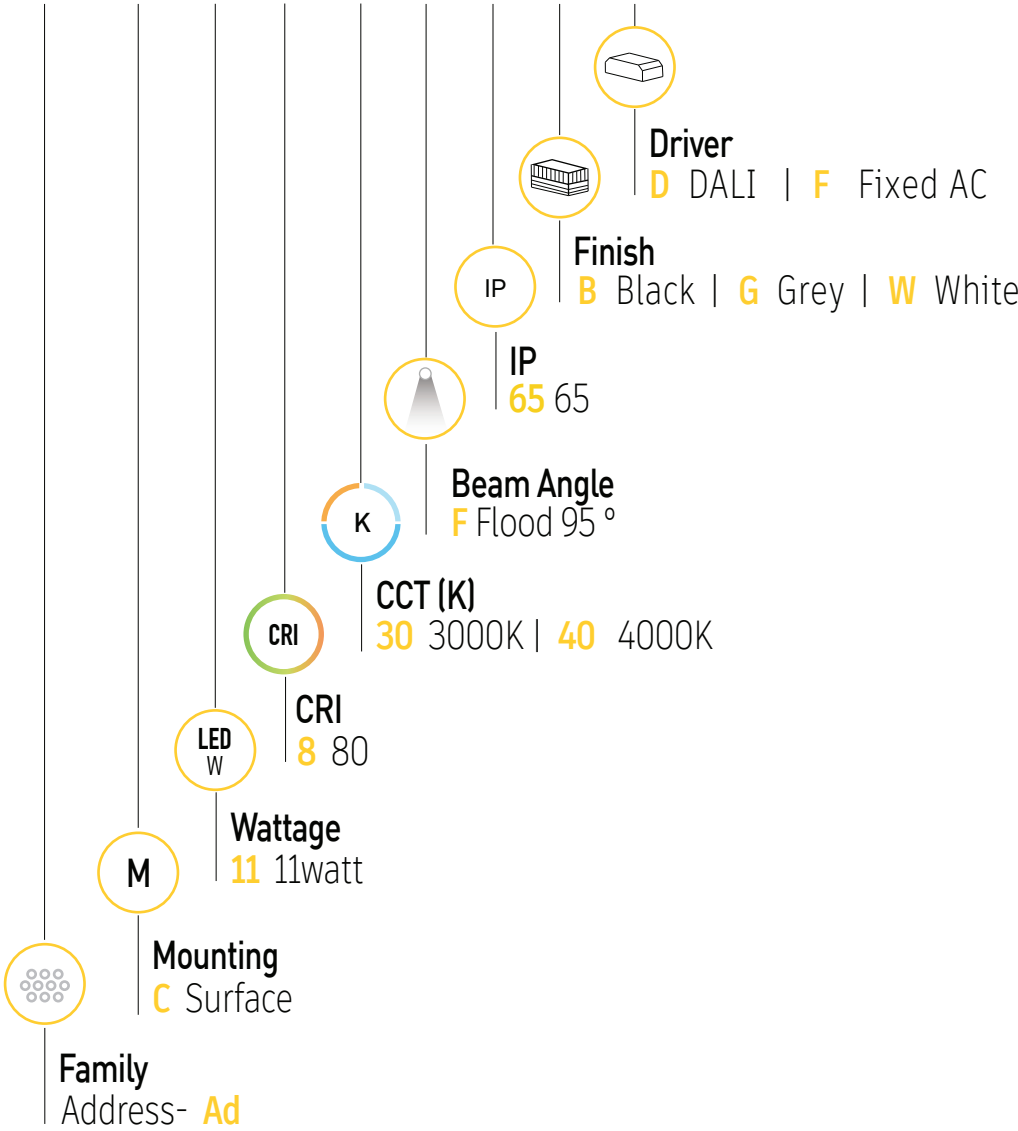

BR - AD X X C XX.8 XX F 65 X - X

Configure luminaire specs & send us the code for order confirmation



# Address

Wall Mounted

Optional Application




Dimmable

Brighton luminaires Map


- Brighton Luminaires Range
- Selected Luminaire Default placement

Indoor

Outdoor

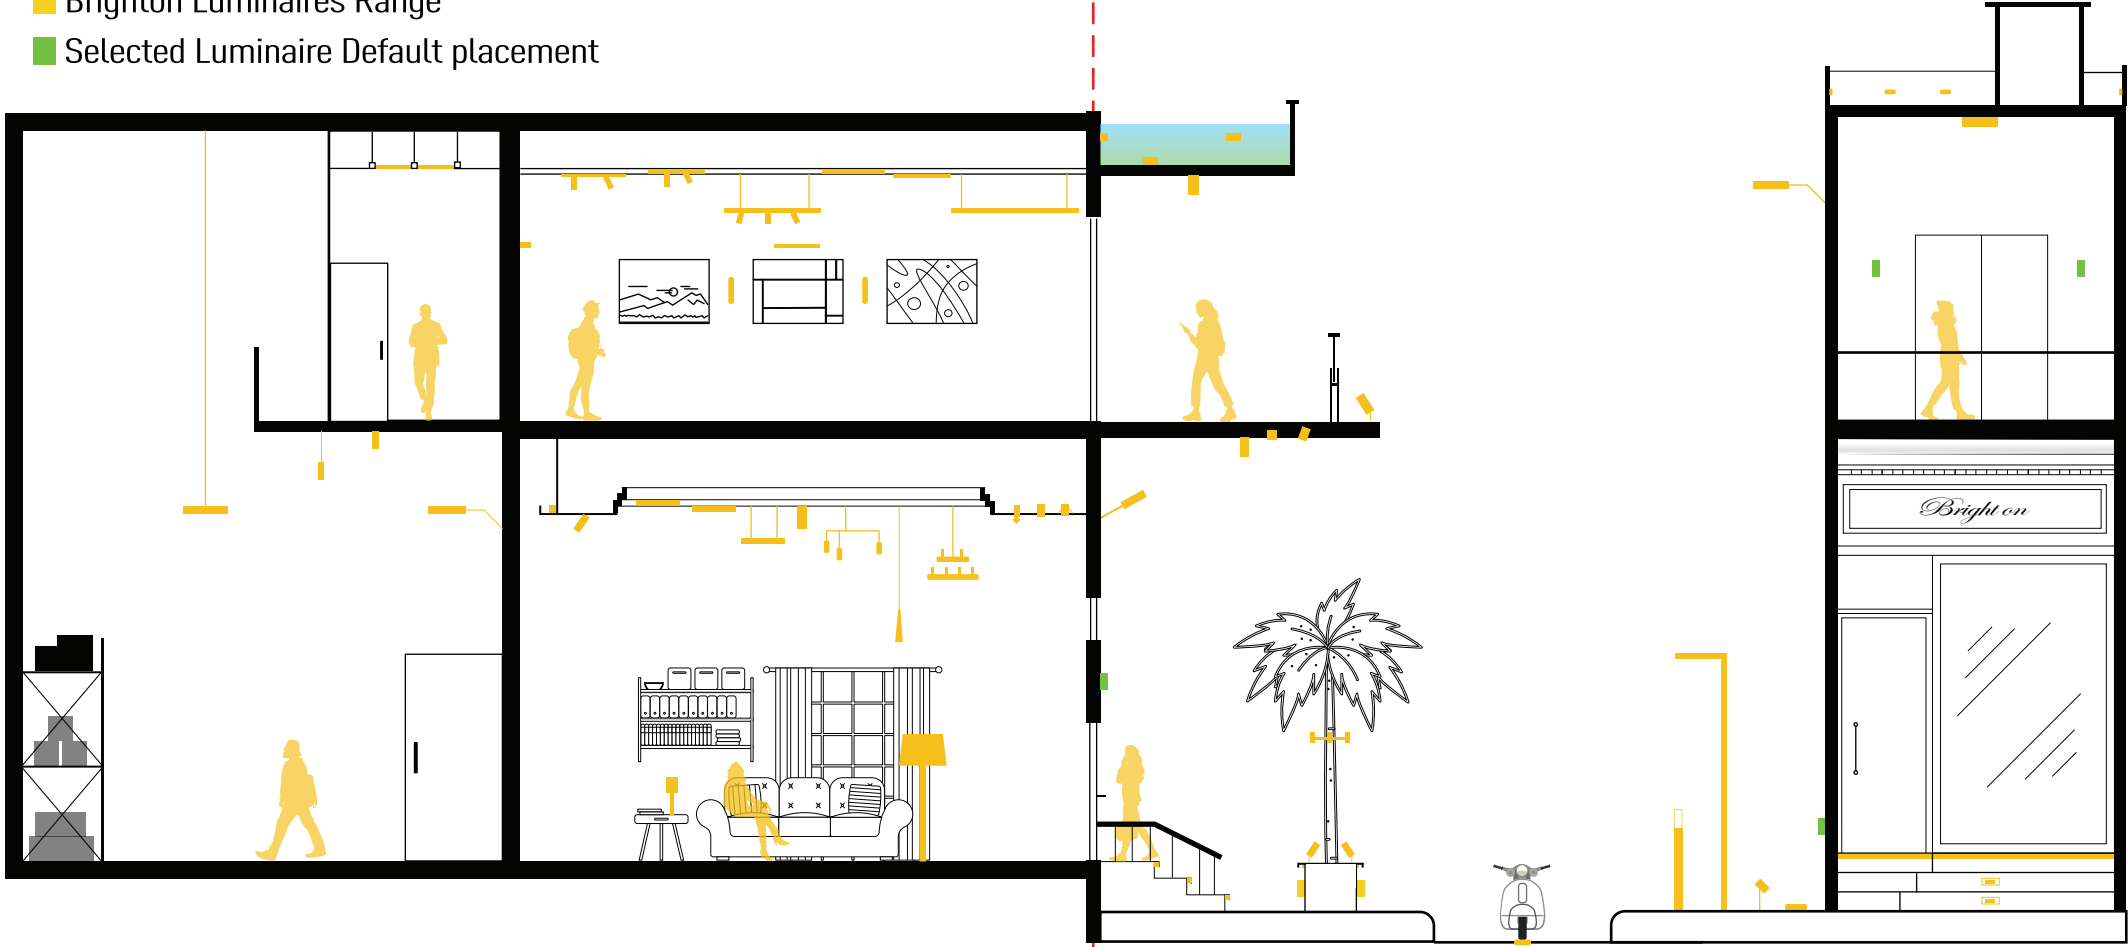


Accessories




# Address

Wall Mounted

11 Watt 95° Flood  
Polar Curve

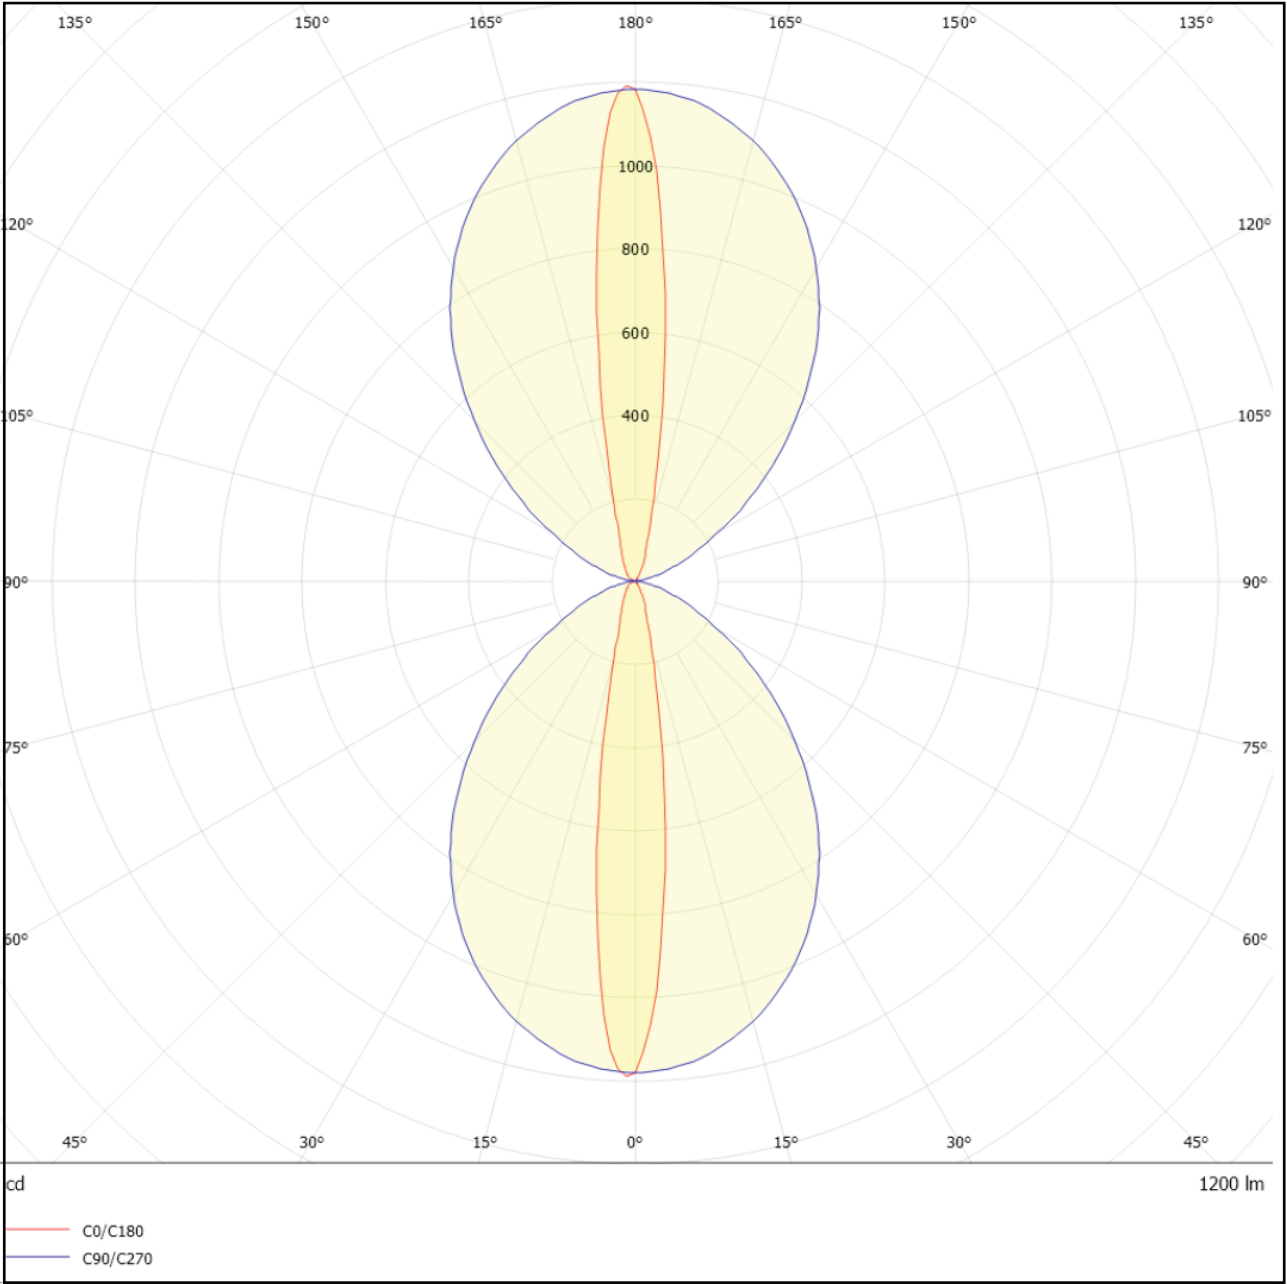

11 Watt 95° Flood  
Cone Diagram

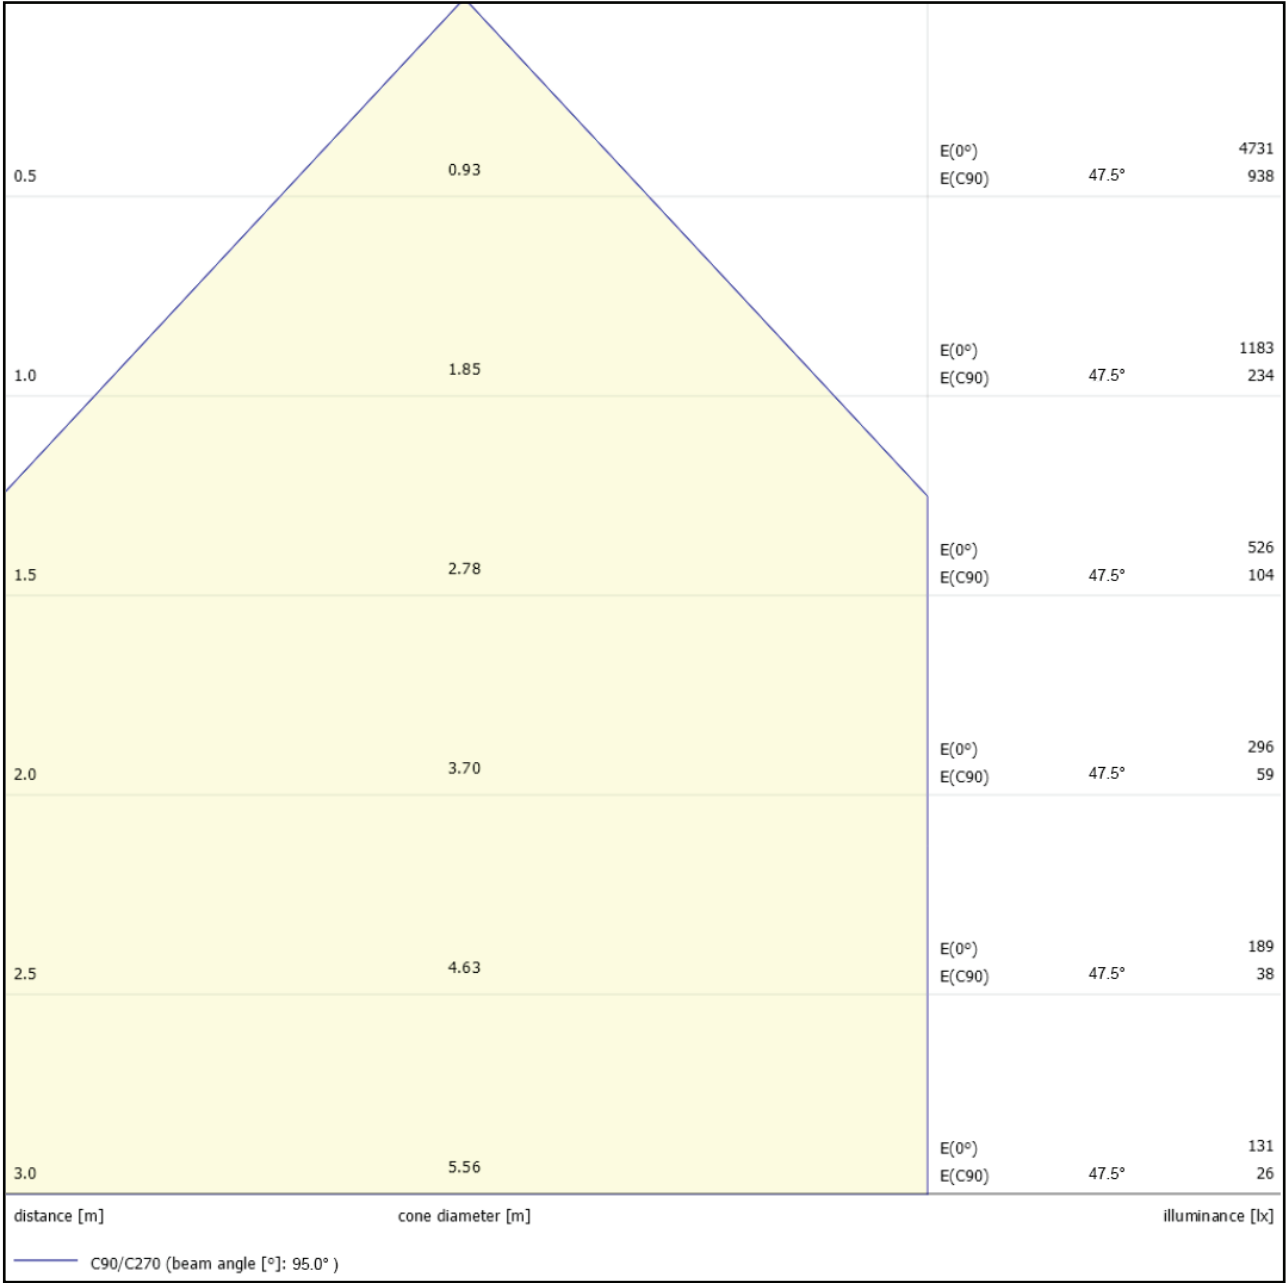





Address AD

BRIGHTON  N