

Onira

Wall Mounted



DESCRIPTION

Ceiling/wall surface mounting plafonira for unshielded light in the room.
Polycarbonate body with opal diffuser. Available in different sizes,
for a wide range of lighting applications, that fits both indoors & Outdoors.

TRIDONIC

Driver

LUMILEDS

LED Chip

IK08 IP65 IP54 CB

Illumination Data

Color temprature:	3000K 4000K
Lumen output:	1500 LM 2100LM
CRI	80
Beam angle	120° Flood

Physical Specification

Material Finish	Polycarbonate
Diffuser	Polycarbonate
Optics	Opal
Ingress protection (IP)	54 65
Impact Protection (IK)	08

Electric Characteristics

Light source	LED Built in
LED type	SMD
Power	15 Watt 21 Watt
P.F	>0.9
LED chip	Lumileds
Driver	Tridonic

Installation


Installation	Surface Wall Mounted
Wiring	Product complete with electronic components

Luminaire Body Finish Color


White Ral 9003	
Grey Ral 9006	
Black Ral 9005	

Certificate & Warranty

Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Dimensions & Specs

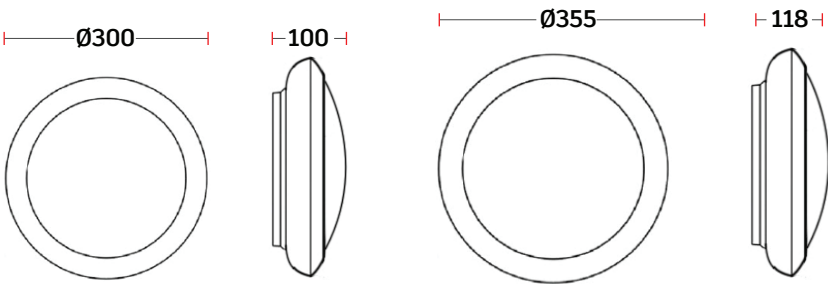

DIM 1

DIM 2

All dimensions in these sketches are in millimeters*

Dimnesions & specs of luminaires

Dim	Ø	Thickness
1	300mm	100mm
2	355mm	118mm


All dimensions in this schedule table are in millimeters*

Specs

Wattage (W)	lumen (lm)
15 watt	1500lm
21 watt	2100lm


Product coding system

BR - ON X C XX.8 XX S 65 X - X

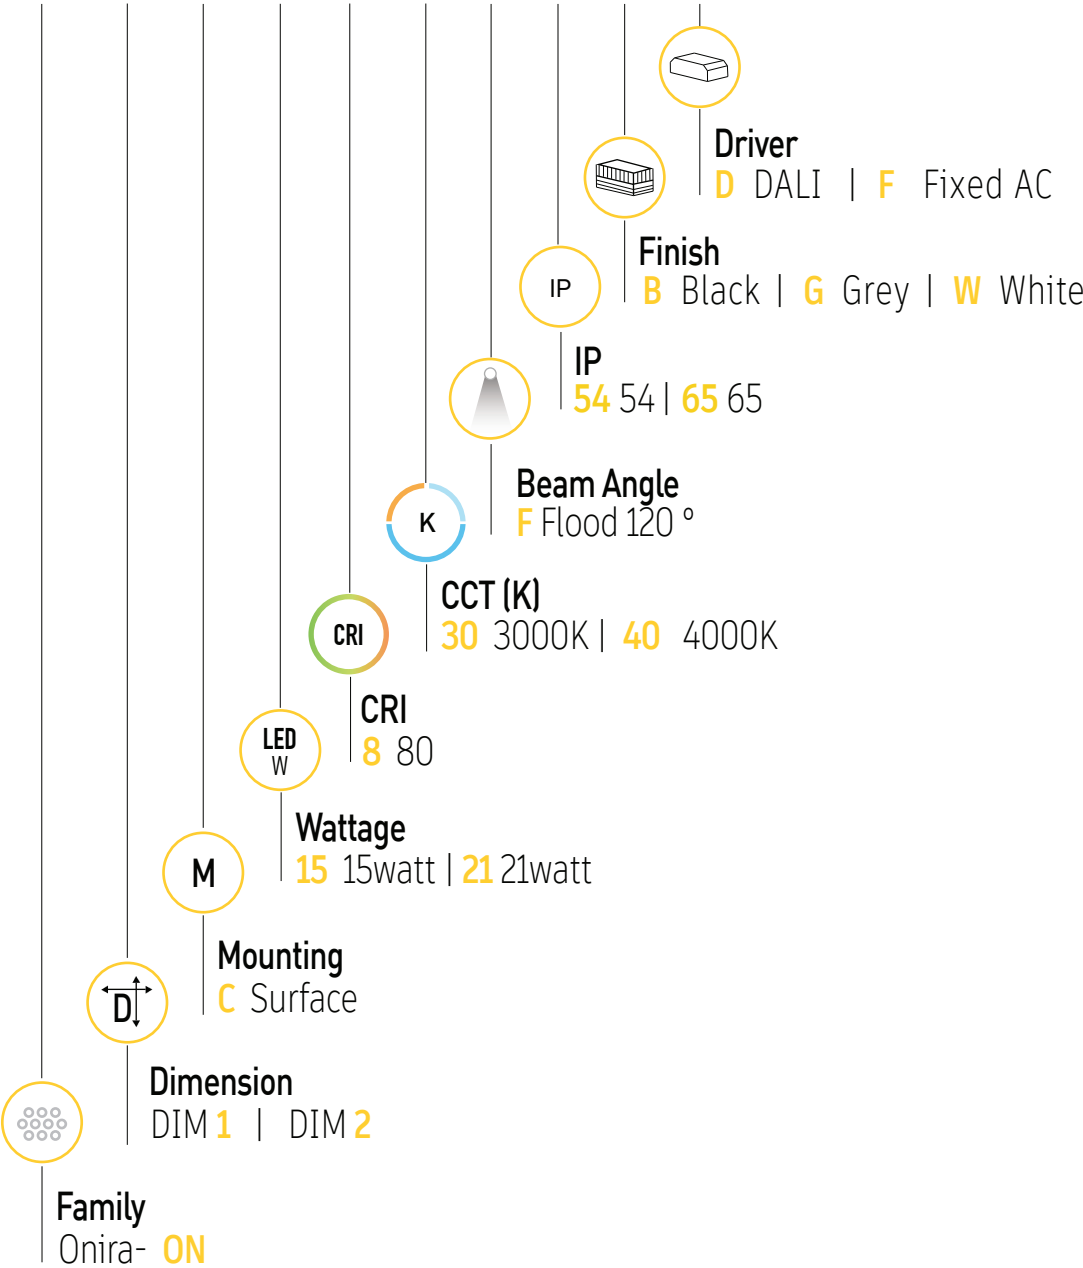

BR - ON X C XX.8 XX S 65 X - X


Configure luminaire specs & send us the code for order confirmation



Onira

Wall Mounted

Optional Application



Battery



Dimmable


Brighton luminaires Map

Brighton Luminaires Range

Selected Luminaire Default placement

Indoor


Outdoor

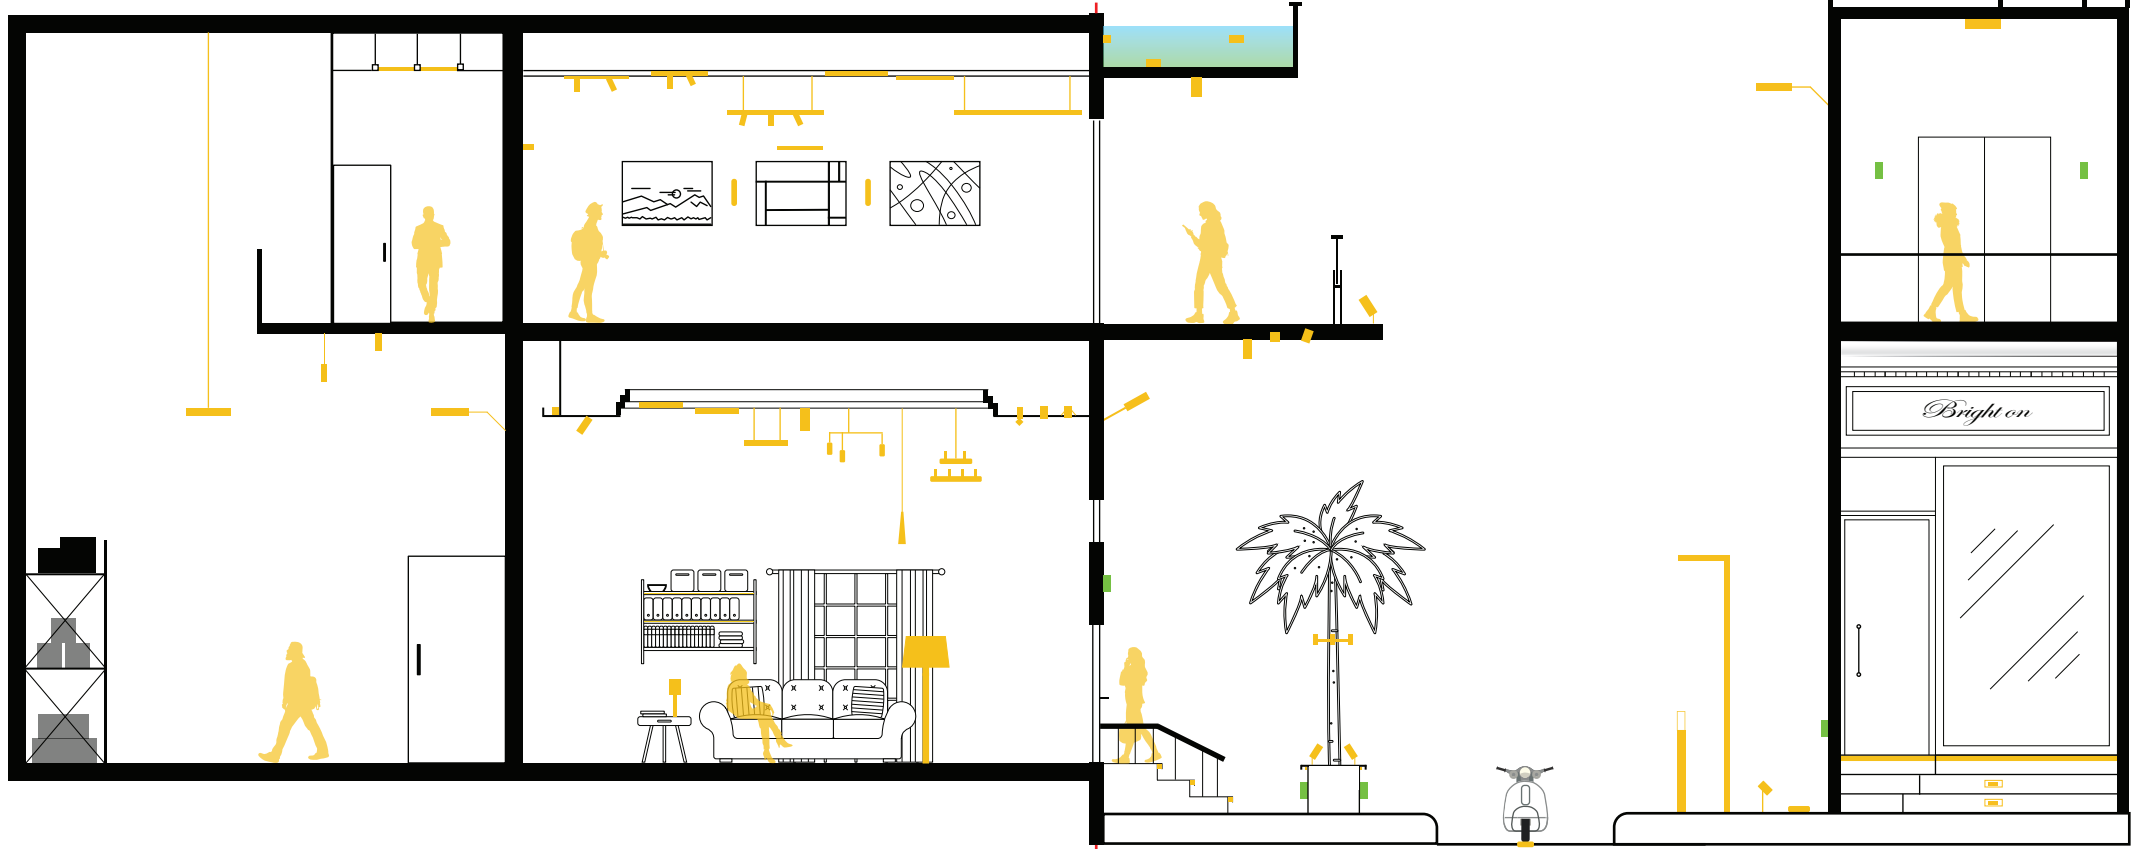

Accessories



distance [m]	cone diameter [m]	illuminance [lx]
0.5	1.41	3019 294
1.0	2.81	755 74
1.5	4.22	335 33
2.0	5.63	189 18
2.5	7.04	121 12
3.0	8.44	84 8

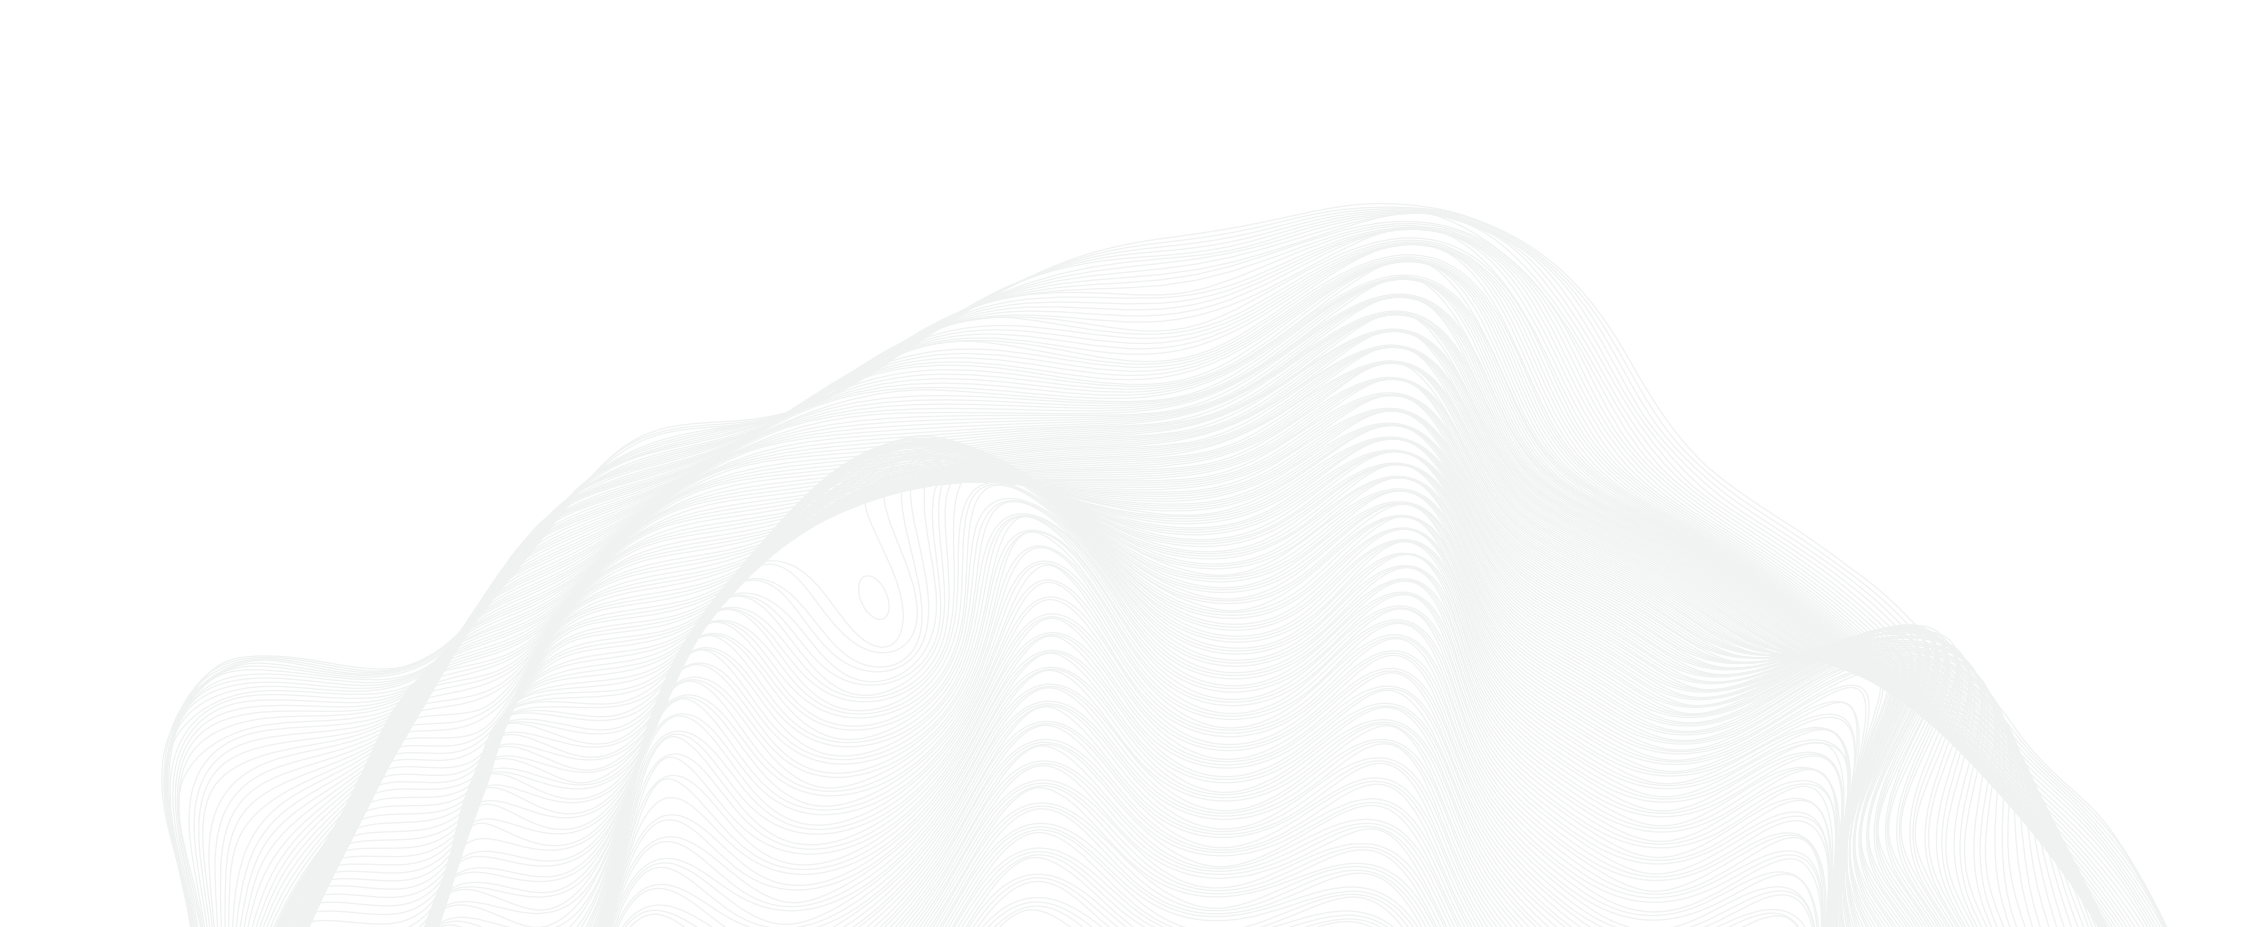

Onira ON

BRIGHTON