

Ray XL

Wall Mounted



DESCRIPTION

A robust surrounding frame wall mounted made of aluminum shell & glass diffuser. Such luminaires facilitate a wide range of Indoors & outdoors applications.

PHILIPS

Driver

LUMILEDS

LED Chip



Illumination Data

Color temperature:	3000K 4000K
Lumen output:	1200 LM
CRI	80
Beam angle	360° Special

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Polycarbonate & Glass
Optics	Opal & clear glass
Ingress protection (IP)	65
Impact Protection (IK)	08

Electric Characteristics

Light source	LED Built in
LED type	SMD
Power	15 Watt
P.F	>0.9
LED chip	Lumileds
Driver	Philips

Installation


Installation	Surface Wall Mounted
Wiring	Product complete with electronic components

Luminaire Body Finish Color

Grey Ral 9006	
Black Ral 9005	

Certificate & Warranty


Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Ray XL

Wall Mounted

Dimensions & Specs

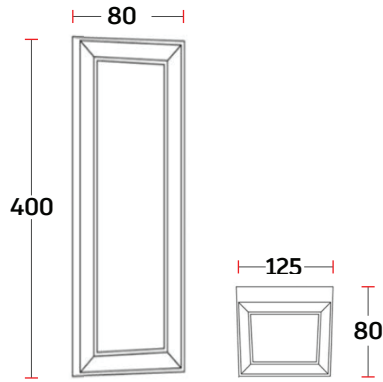

DIM 1

All dimensions in these sketches are in millimeters*

Dimnesions & specs of luminaires

Dim	Length	Width	Height
1	140mm	135mm	400mm


All dimensions in this schedule table are in millimeters*

Specs

Wattage (W)	lumen (lm)
15watt	1200lm


Product coding system

BR - RX C 15.8 XX S 65 X - X

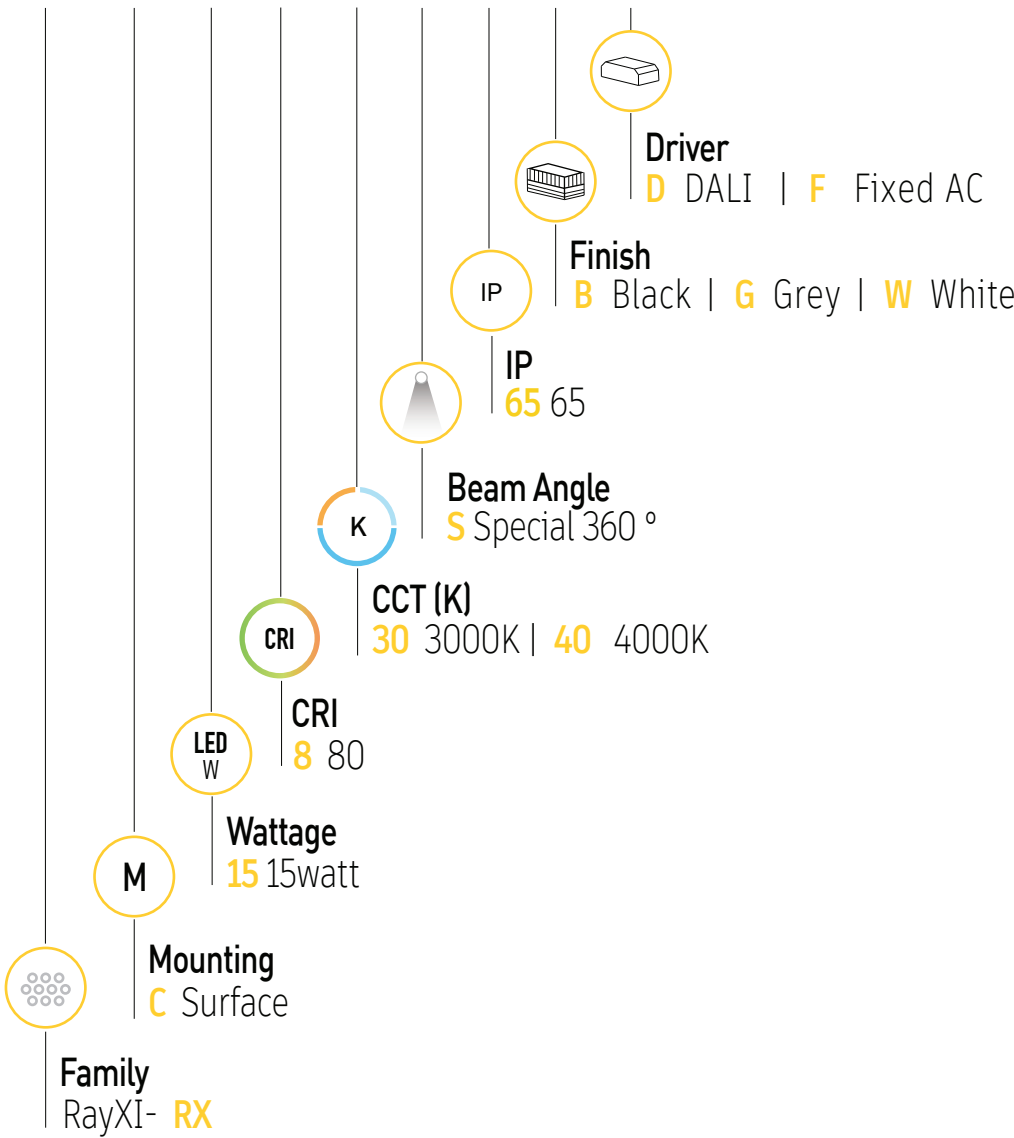

BR - RX C 15.8 XX S 65 X - X

Configure luminaire specs & send us the code for order confirmation



Ray XL

Wall Mounted

Optional Application




Dimmable

Brighton luminaires Map


- Brighton Luminaires Range
- Selected Luminaire Default placement

Indoor

Outdoor

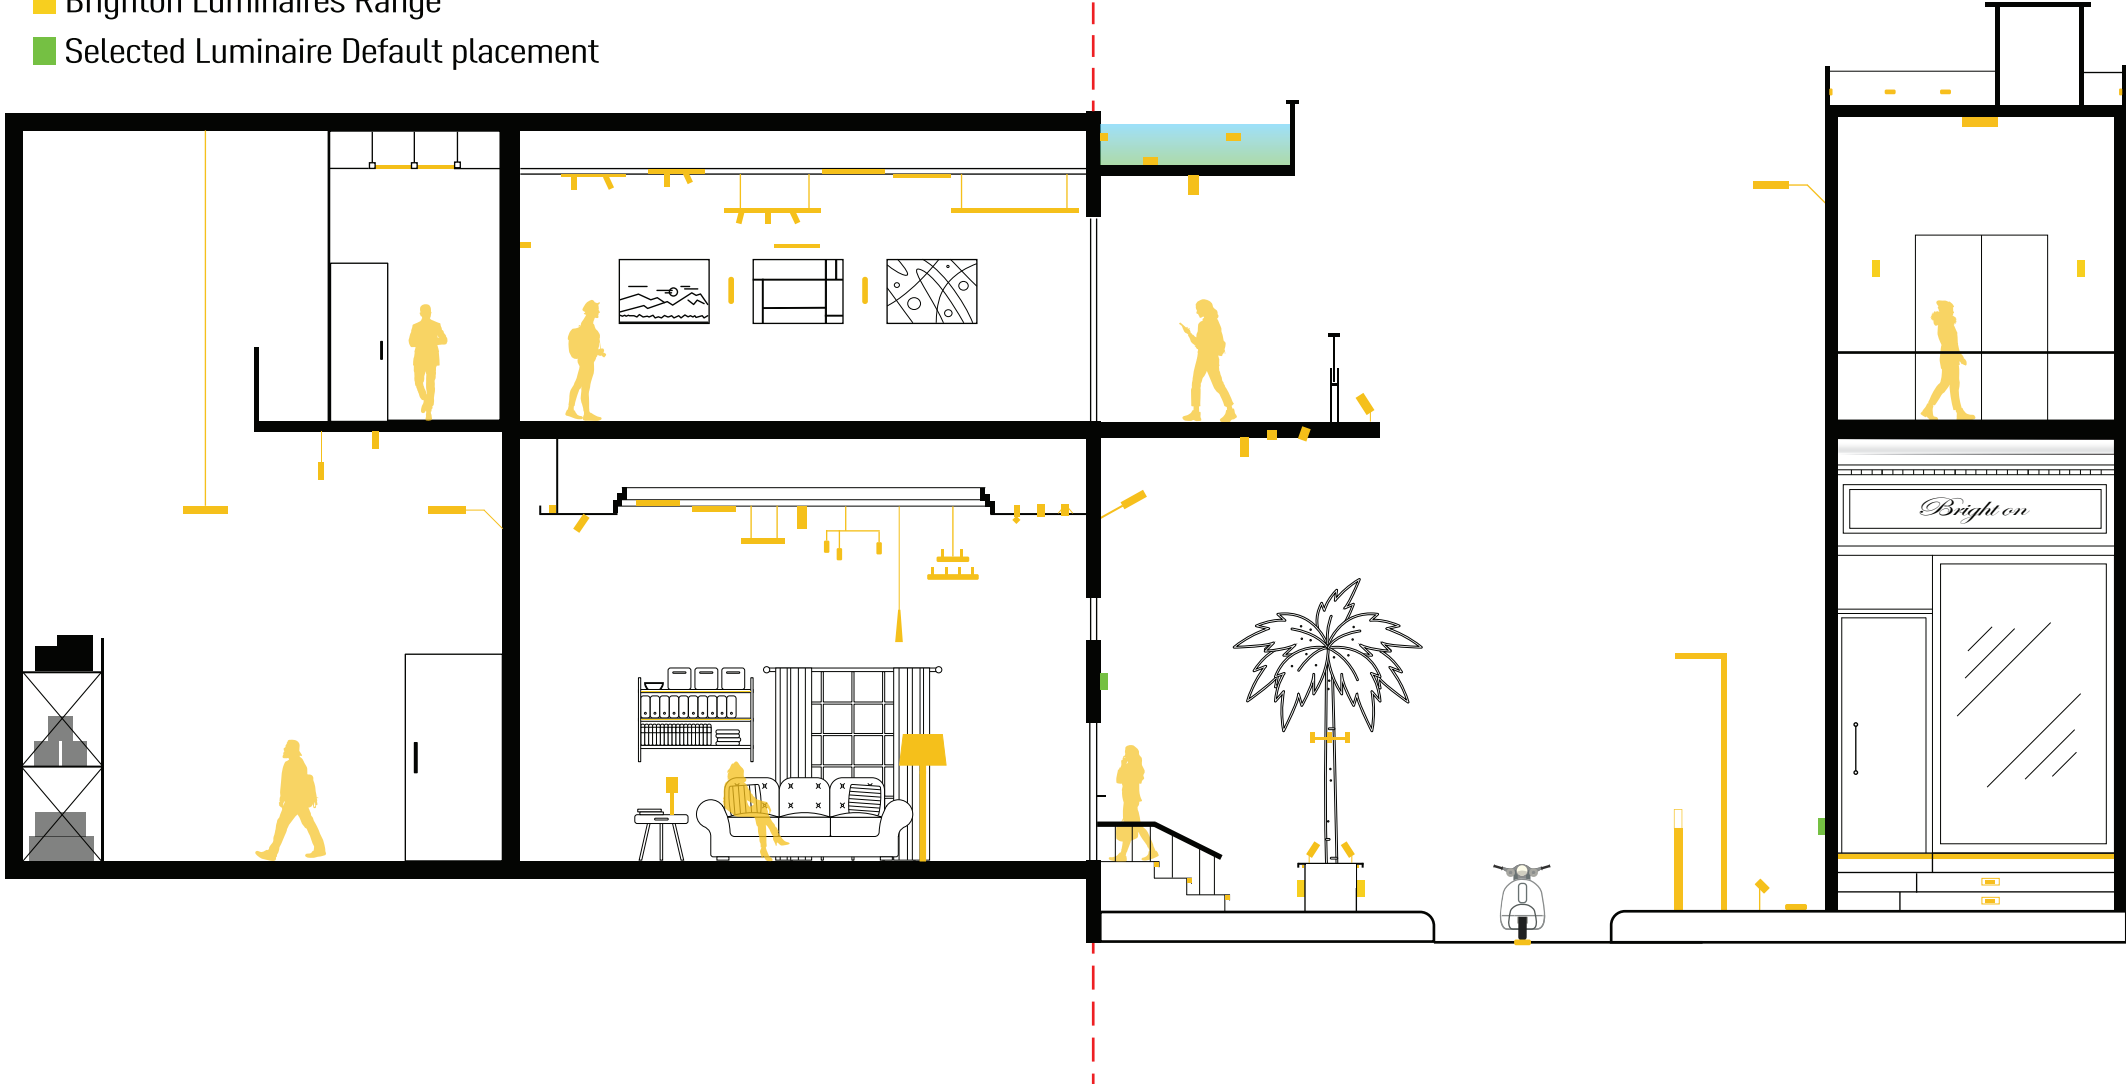


Accessories




Ray XL

Wall Mounted

360° Special
Polar Curve

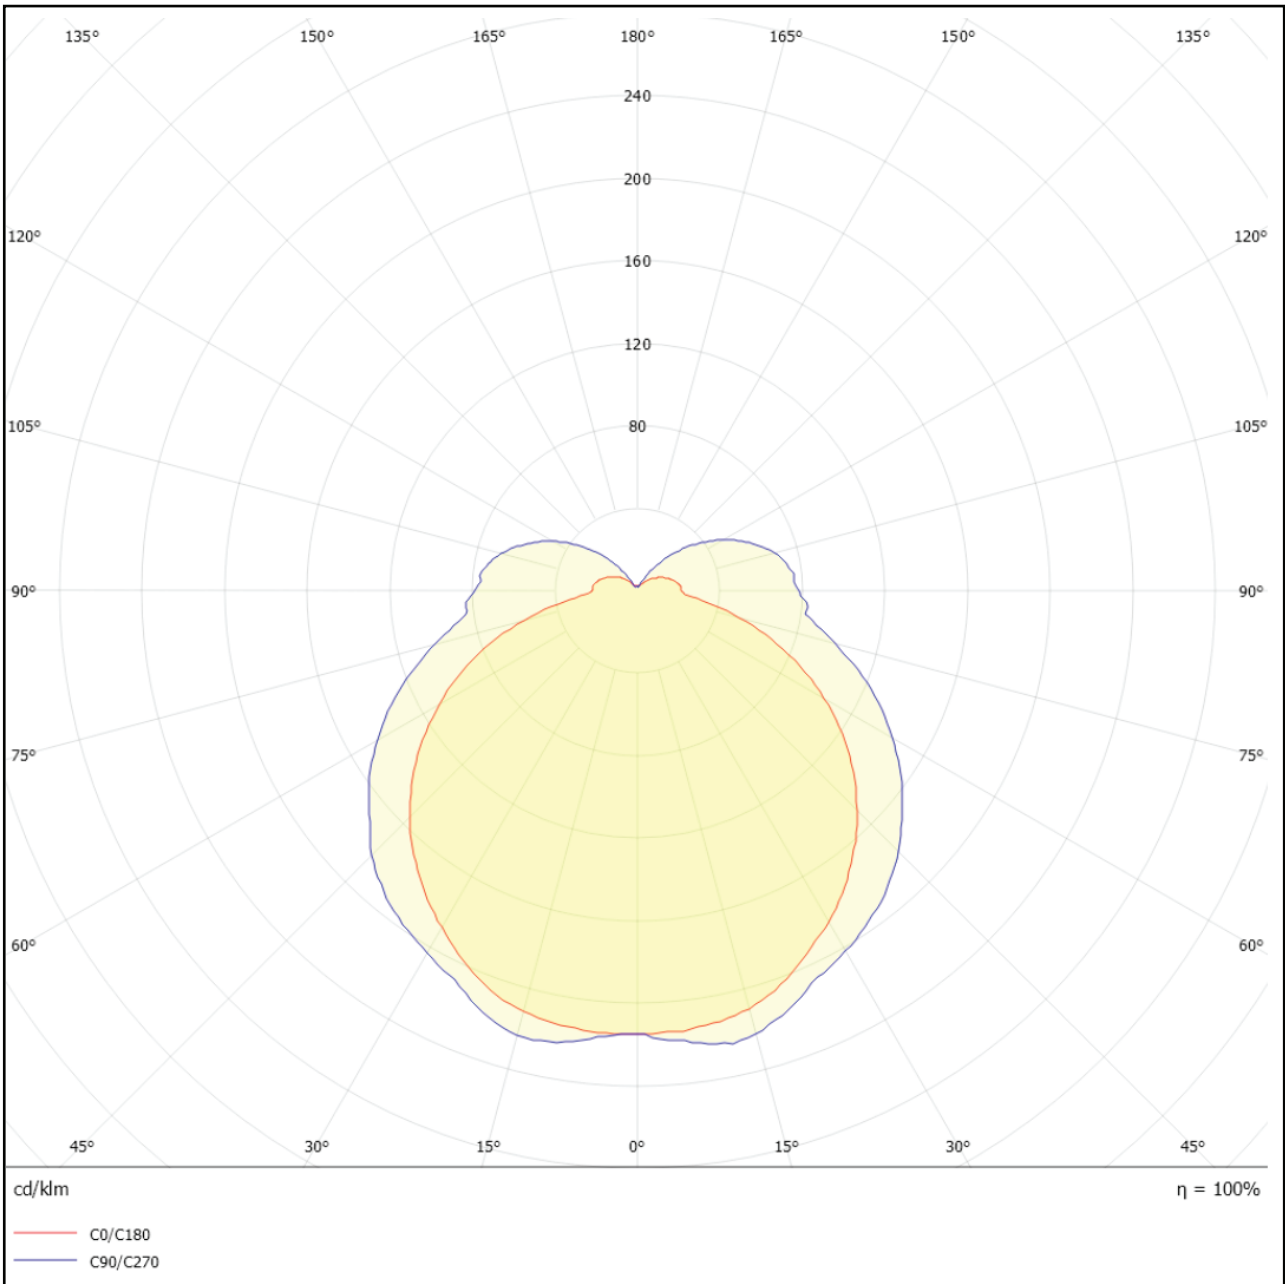

360° special
Cartesian Diagram

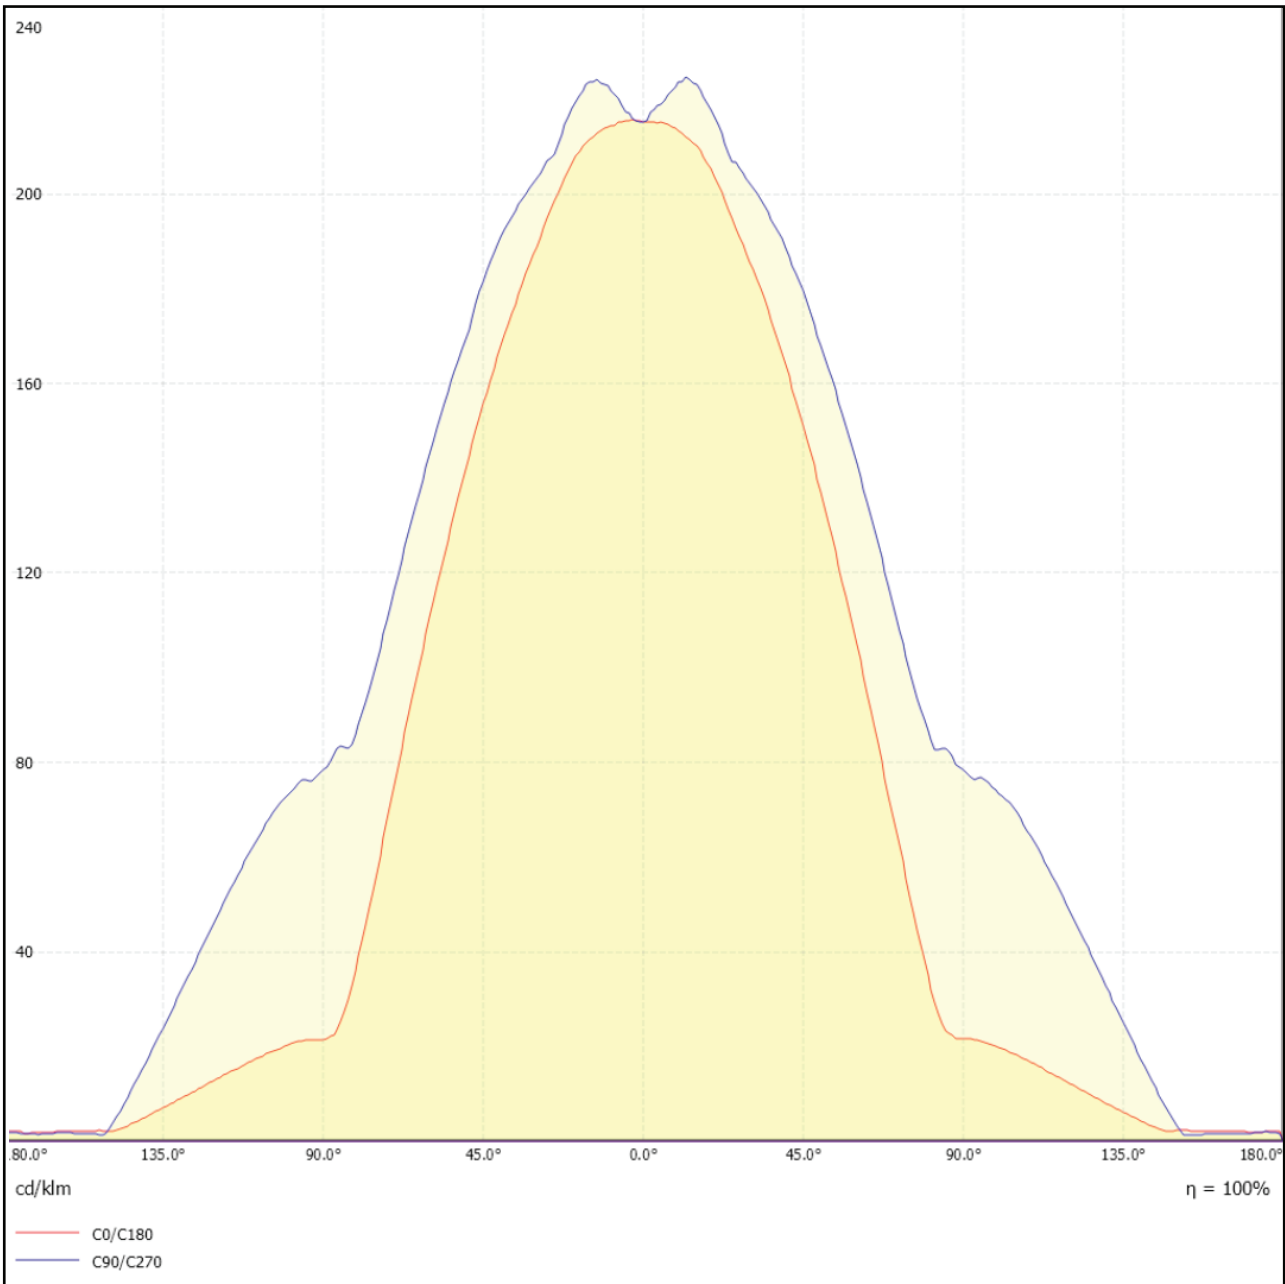

Ray XL RX

BRIGHTON

