

DESCRIPTION

Surface mounted bulkhead fits for installation on ceilings or walls.
Complete with an integrated energy-efficient LED module Or E27 Lamp.

PHILIPS TRIDONIC



LUMILEDS

Driver

LED Chip

IK08 IP65 IP44 CB

Illumination Data

Color temprature:	3000K 4000K
Lumen output:	1000 LM Lamp output
CRI	80
Beam angle	110° Flood

Physical Specification

Material Finish	Polycarbonate
Diffuser	Polycarbonate Glass
Optics	Opal Clear
Ingress protection (IP)	44 65
Impact Protection (IK)	08

Electric Characteristics

Light source	LED Built in E27 Lamp
LED type	SMD
Power	10 Watt Lamp output
P.F	>0.9
LED chip	Lumileds
Driver	Tridonic

Installation


Installation	Surface Wall Mounted
Wiring	Product complete with electronic components

Luminaire Body Finish Color


White Ral 9003	
Grey Ral 9006	
Black Ral 9005	

Certificate & Warranty

Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Dimensions & Specs

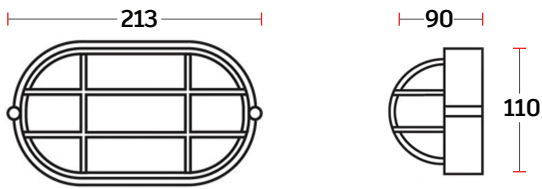

DIM 1

All dimensions in these sketches are in millimeters*

Dimnesions & specs of luminaires

Dim	Length	Width	Height
1	213mm	90mm	110mm


All dimensions in this schedule table are in millimeters*

Specs

Wattage (W)	lumen (lm)
10 watt E27 Lamp	1000lm


Product coding system

BR - RI C XX.8 XX S 65 X - X

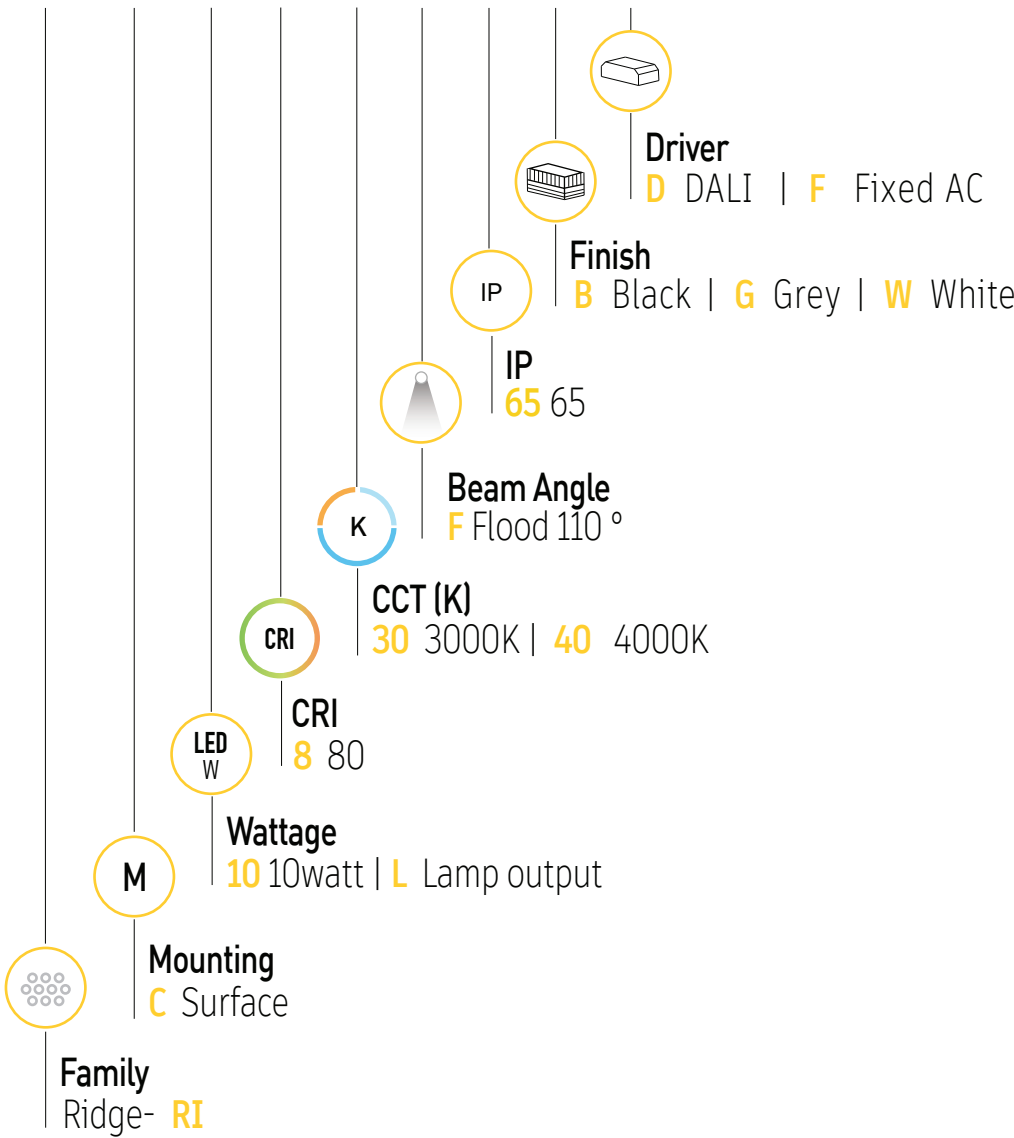

BR - RI C XX.8 XX S 65 X - X

Configure luminaire specs & send us the code for order confirmation



Optional Application




Dimmable

Brighton luminaires Map


- Brighton Luminaires Range
- Selected Luminaire Default placement

Indoor


Outdoor

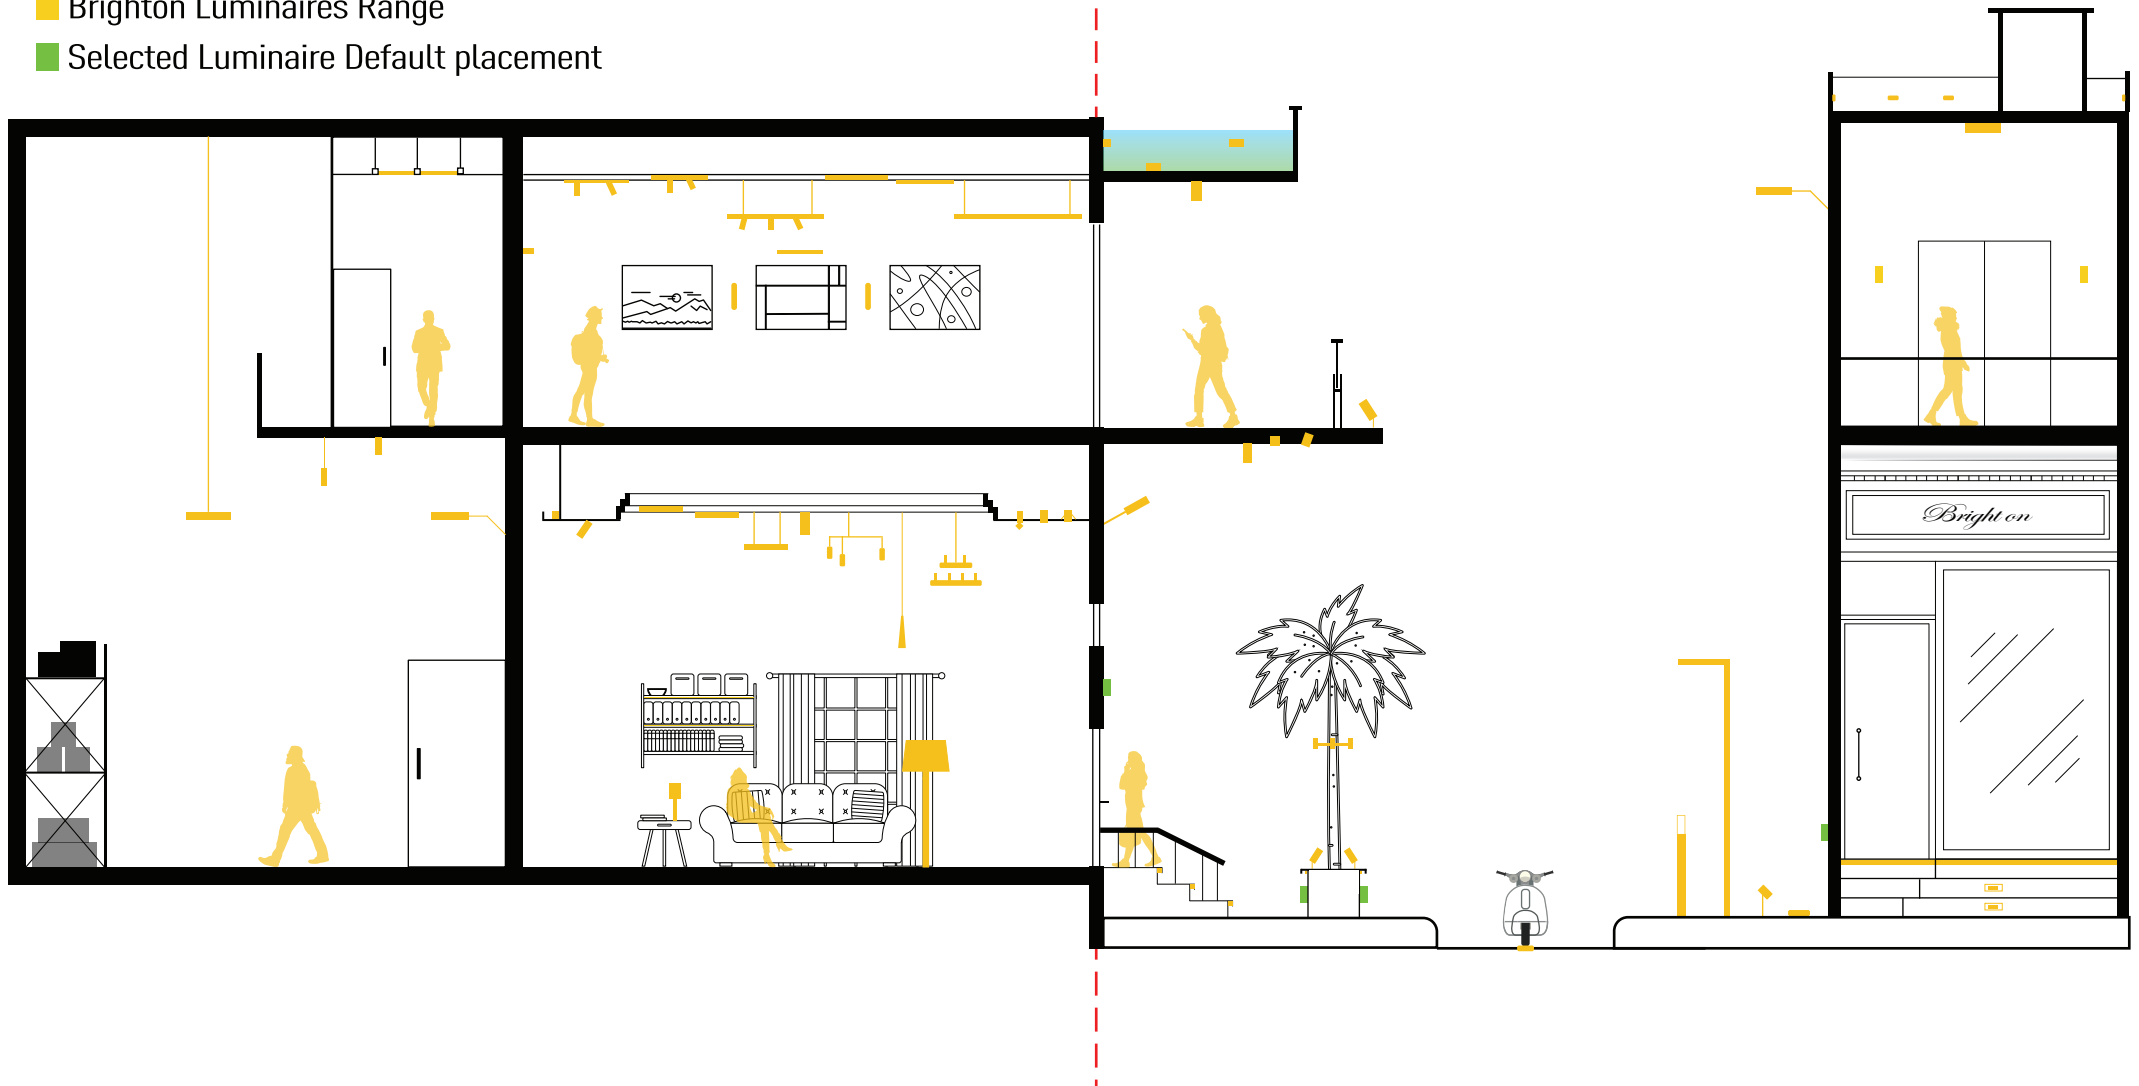


Accessories



10 Watt 110° Flood
Polar Curve

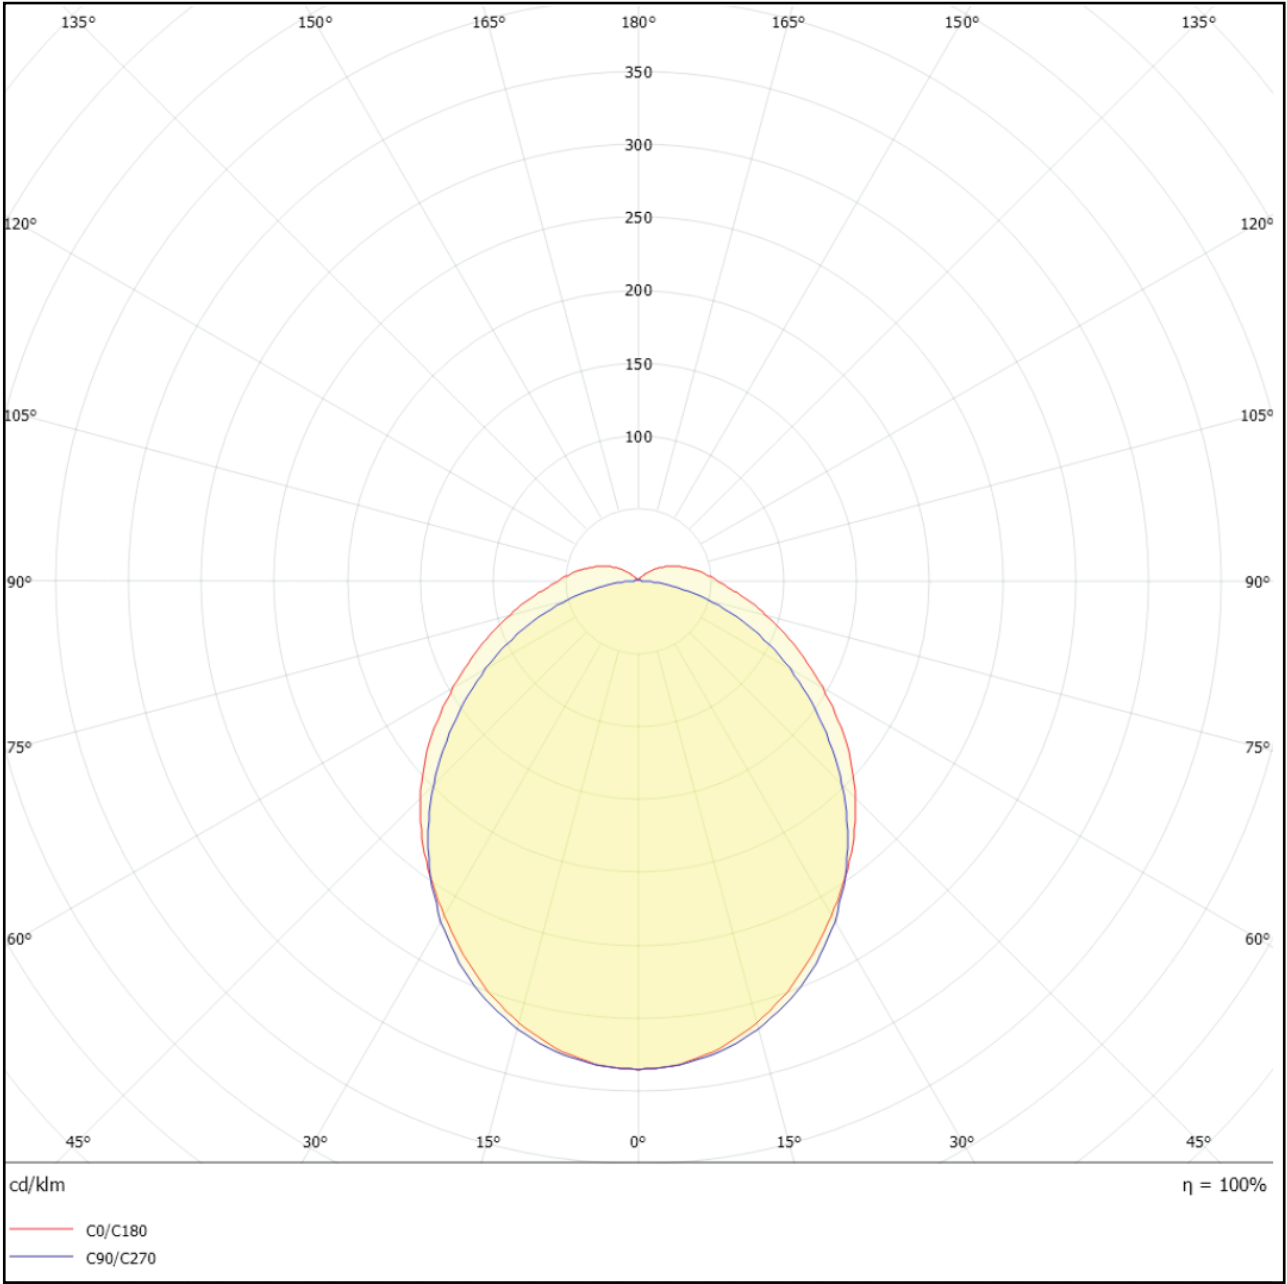

10 Watt 110° Flood
Cone Diagram

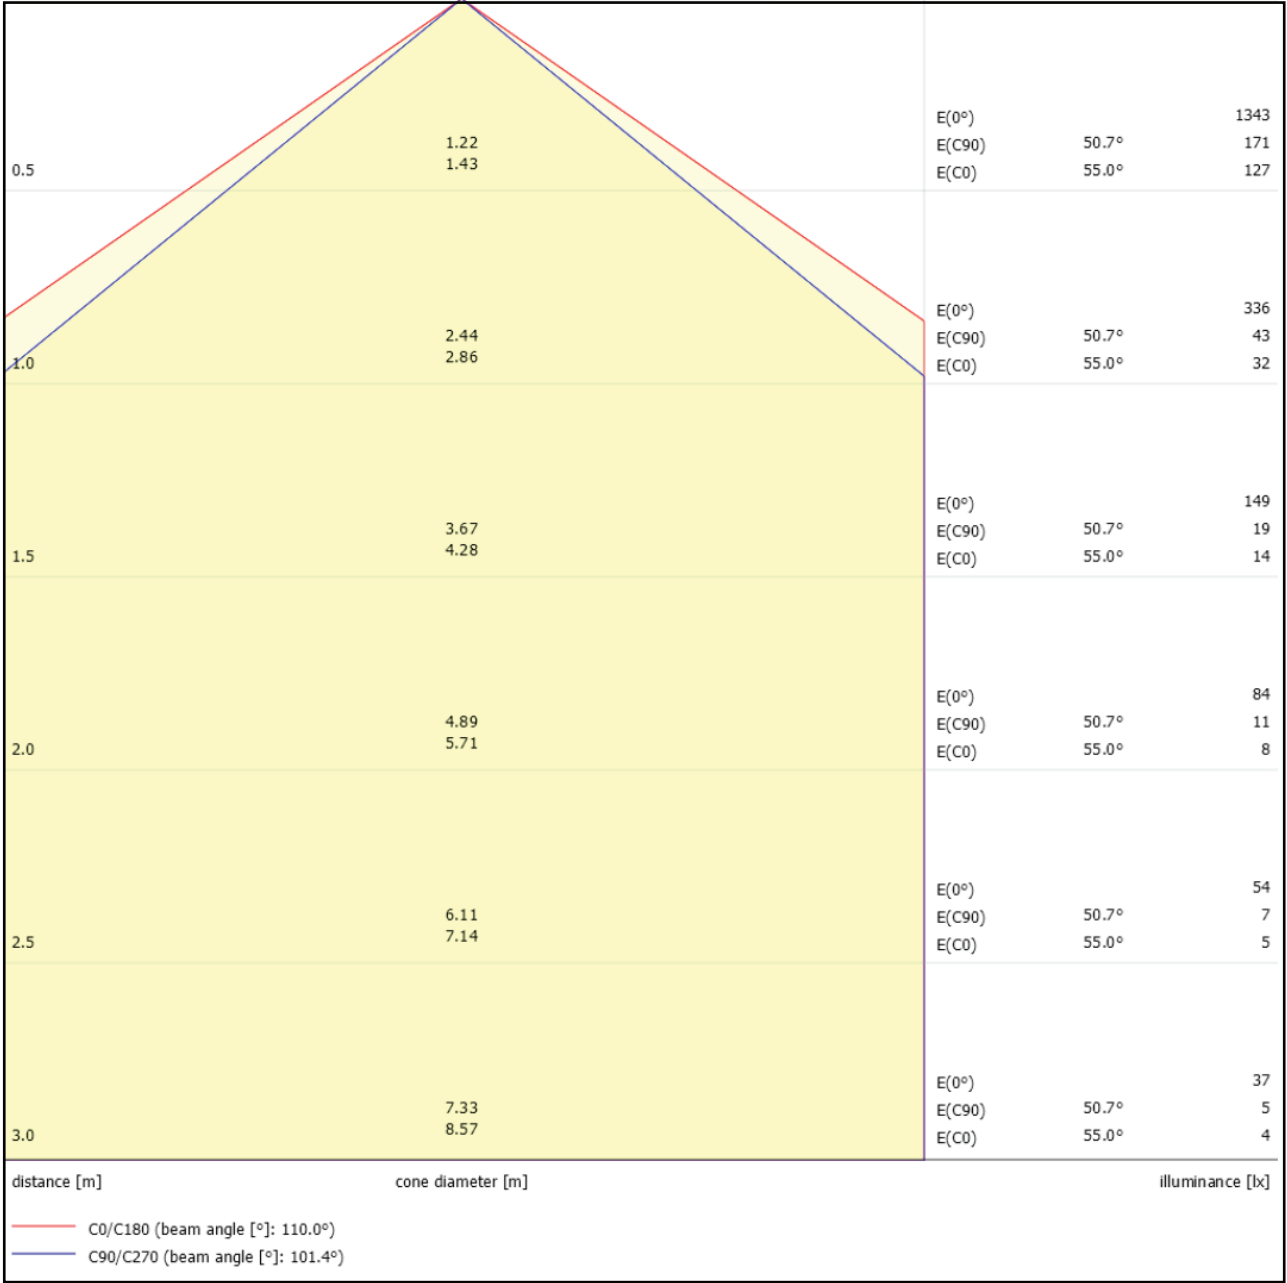

Ridge RI

B R I G H T  N

