



Vitra

Downlight



DESCRIPTION

Vitra is a compact downlight with textured opal cover. A minimum height allows to be installed in low ceilings, always guaranteeing excellent heat dissipation thanks to the aluminum body.



Driver



LED Chip



Illumination Data

Color temprature:	3000K 4000K
Lumen output:	800LM 960LM 1600LM 2400LM
CRI	80
Beam angle	120° Flood
UGR	<19

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Polycarbonate
Optics	Opal
Ingress protection (IP)	54
Impact Protection (IK)	08

Electric Characteristics

Light source	LED Built in
LED type	COB
Power	10 Watt 15 Watt 20 Watt 30 Watt
P.F	>0.9
LED chip	Lumileds
Driver	Philips

Installation

Installation	Ceiling Recessed
Wiring	Product complete with electronic components

Luminaire Body Finish Color

White Ral 9003



Certificate & Warranty



Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years





Vitra

Downlight

Dimensions & Specs

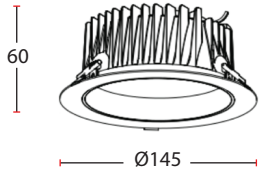

All dimensions in these sketches are in millimeters

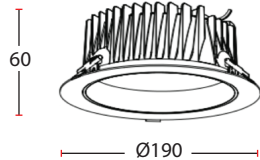

Dimnesions of luminaires

Dim	Diameter	Height	Ø Cutout
1	Ø115mm	48mm	Ø100mm
2	Ø145mm	60mm	Ø130mm
3	Ø159mm	60mm	Ø145mm
4	Ø190mm	60mm	Ø175mm


All dimensions in this schedule table are in millimeters

Specs

Dimesnion (mm)	Wattage (W)	lumen (lm)
Dim1	10 watt	800lm
Dim2	15 watt	960lm
Dim3	20 watt	1600lm
Dim4	30 watt	2400lm


BR - VI X R XX.8 XX F 54 W - X

Product coding system

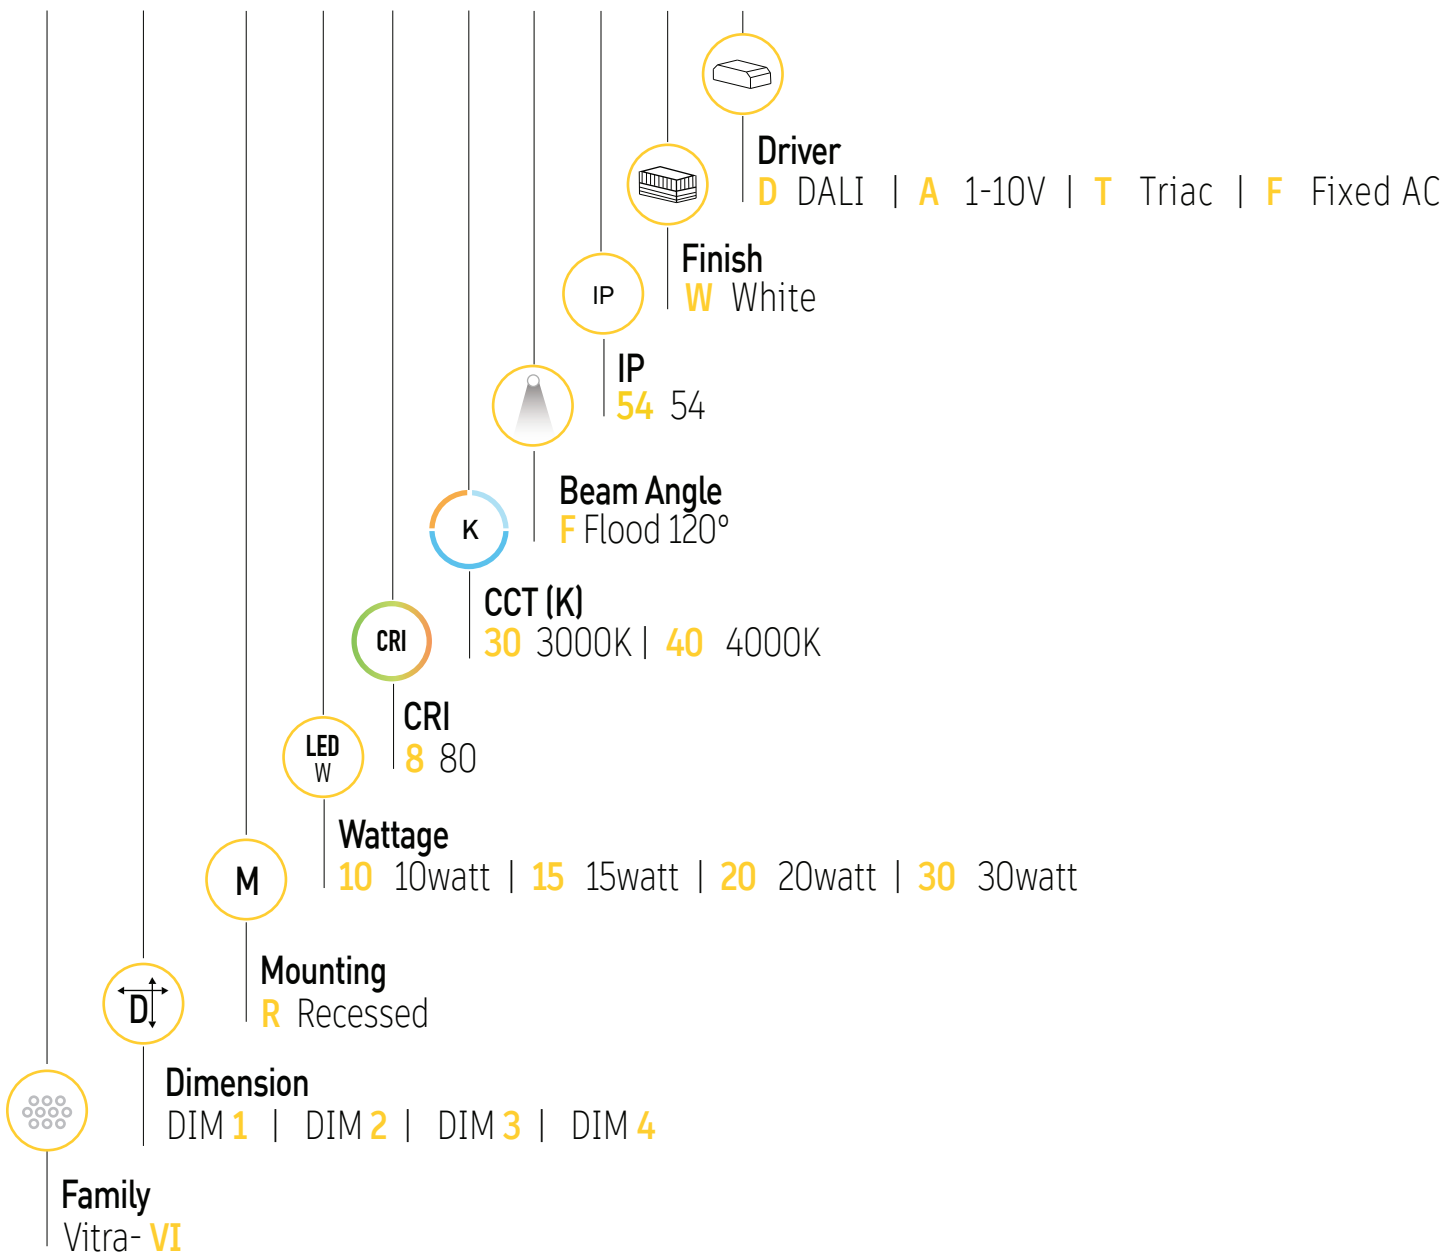


BR - VI X R XX.8 XX F 54 W - X

Configure luminaire specs & send us the code for order confirmation



Optional Application



Battery



Dimmable


Brighton luminaires Map

■ Brighton Luminaires Range

■ Selected Luminaire Default placement

Indoor


Outdoor

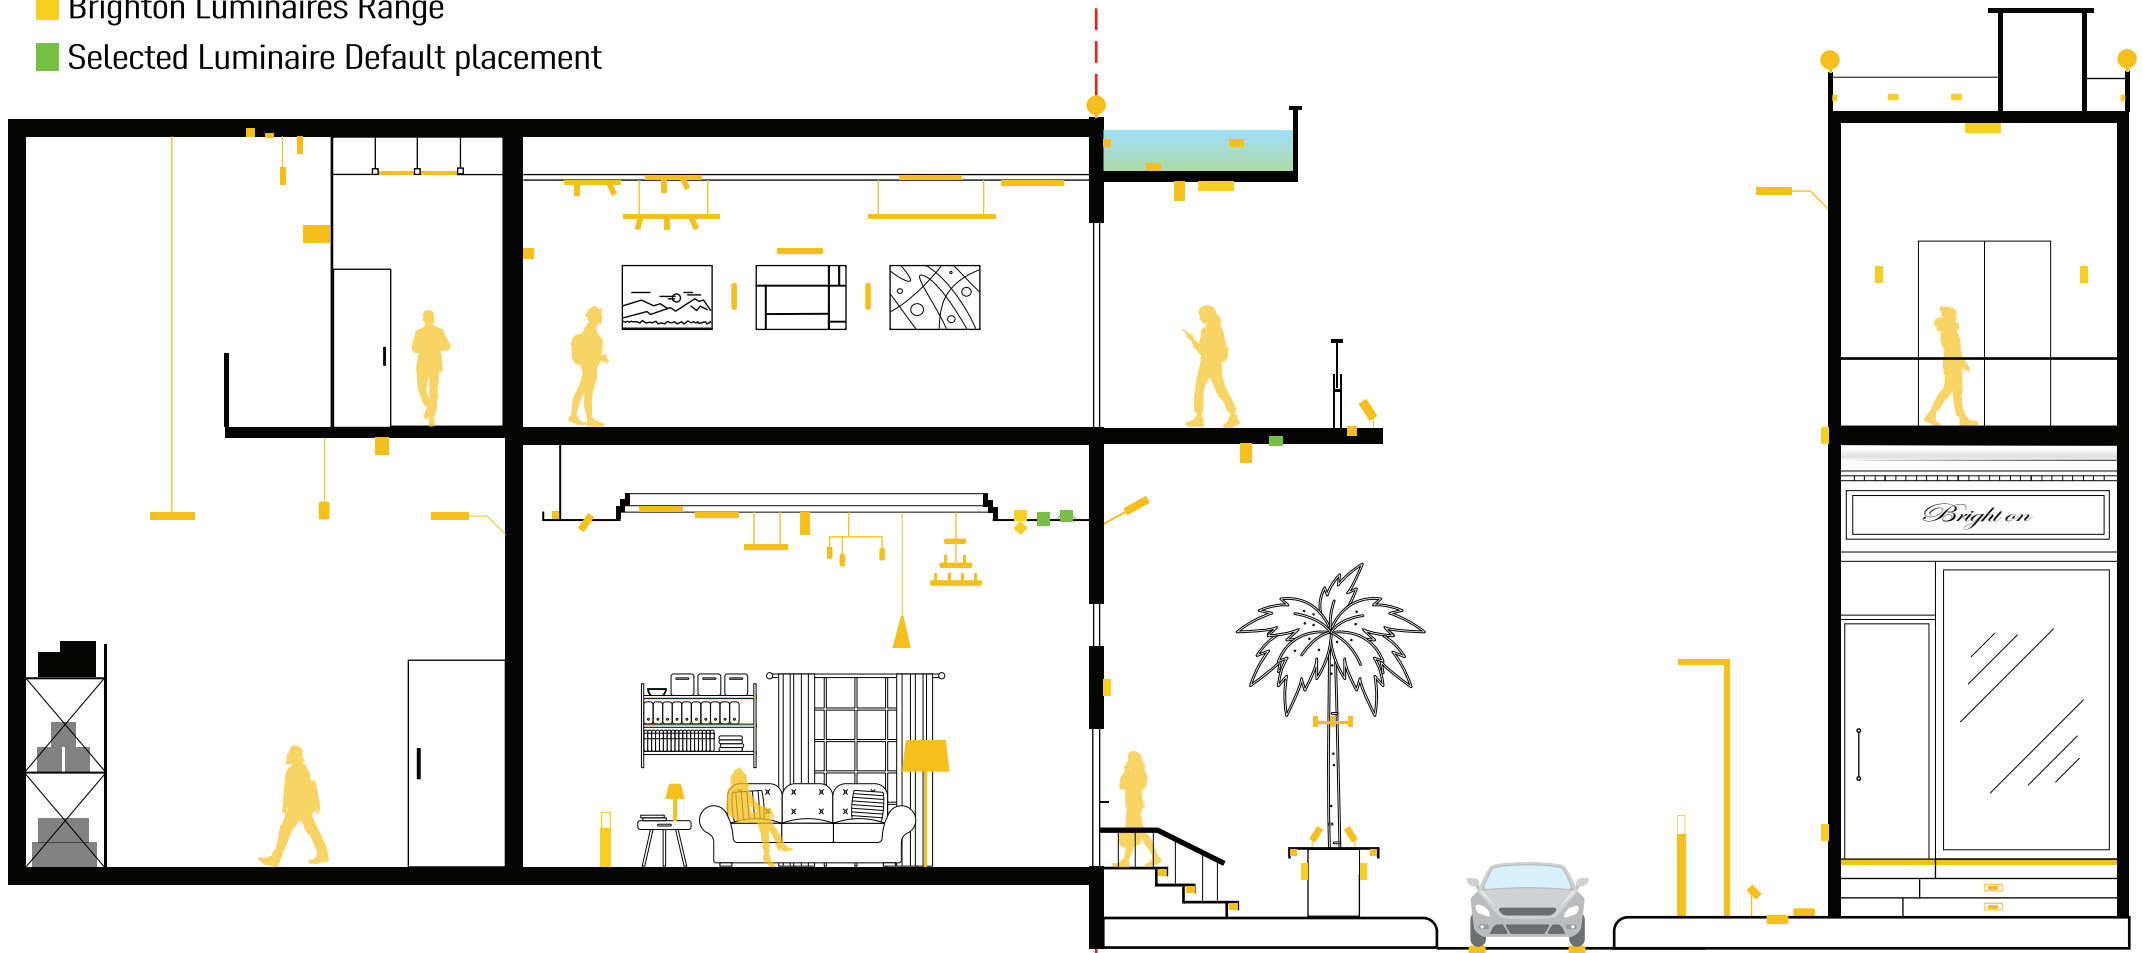

Accessories



15 Watt 120° Beam Angle
Polar Curve

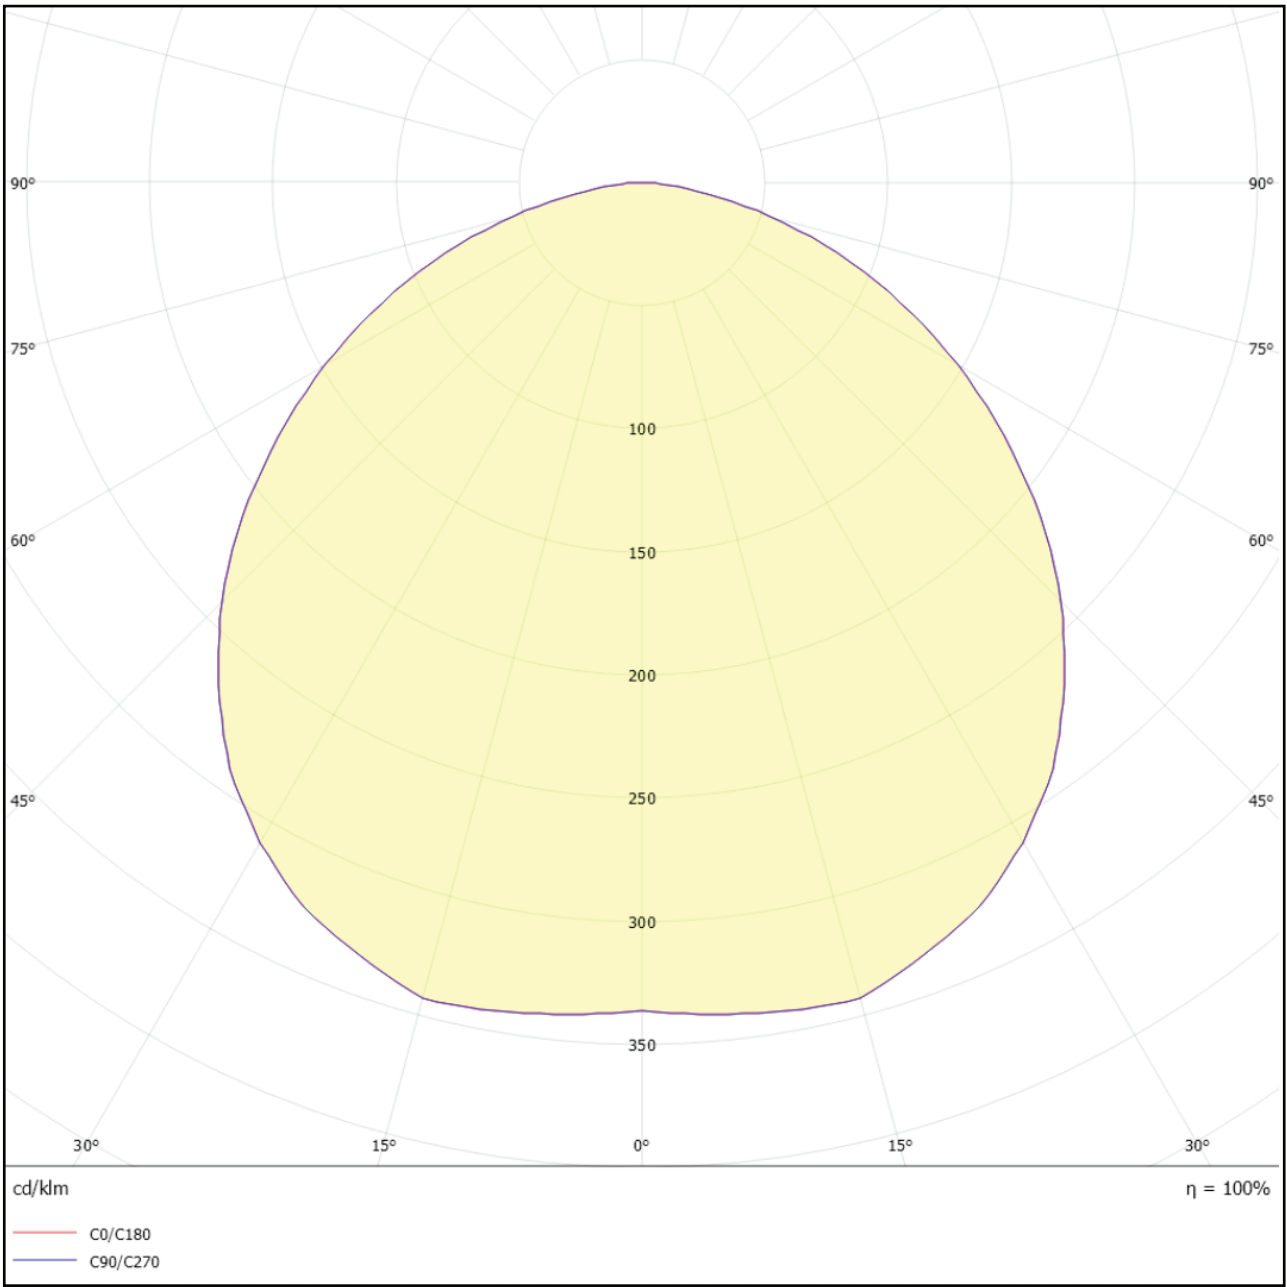

15 Watt 120° Beam Angle
Cone Diagram

