


KUNO

LED In-ground Up-light




DALI | ON/OFF



Wattage Range : **2W - 15W**
 Lumen Range : **120 - 1300lm**
 CCT : **2700K-6500K**
 CRI : **80/90**
 IP Rating : **IP67**
 3 Step Macadam
 Material : **SS & Die Cast Aluminium**
 Lifetime : **L70>50,000 hrs**
 Voltage : **DC24V | 220-240V**

Wattage	D	H	C
2W	32	50	28.5x70
4W	42	65	37x85
7W	65	80	56x105
10W	80	90	71x115
15W	100	106	88x135

Optics : 5° | 10° | 15° | 20° | 30° | 40° | 60°

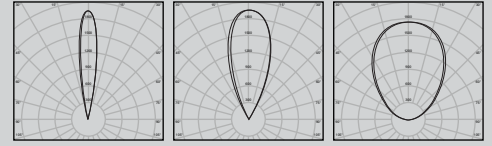

Application

Kuno Uplights are compact, high-performance outdoor fixtures designed to create precise and elegant upward illumination. Their small size allows discreet integration into landscapes, pathways, and architectural details, while delivering powerful, focused LED light. Built with durable materials and high IP protection.

Accessories

Backbox



Optics



Clear
Tempered Glass

Glare Control



Honey Comb

IP68 Connectors



T-Connector



I-Connector

BR-KU X R X X X X

2W-15W

Round

Trim

SS plate

Narrow Medium Wide

6500K 4000K 3000K 2700K



