



# LINE LR

LED Inground Linear Uplight




DALI | ON/OFF

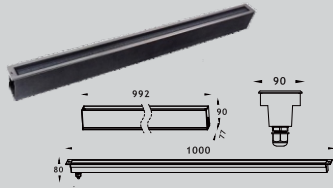

Wattage Range : **12W - 48W**  
 Lumen Range : **700 - 2780lm**  
 CCT : **2700K-6500K**  
 CRI : **80/90**  
 IP Rating : **IP67**  
**3** Step Macadam  
 Material : **Die Cast Aluminium**  
 Lifetime : **L70>50,000 hrs**  
 Voltage : **DC24V | 220-240V**

Wattage	L	W	H	C
12W	300	55	80	55x90
24W	500	55	80	55x90
48W	1000	55	80	55x90

Optics : 15° | 20° | 30° | 45° | 60° | 10°\*30° | 10°\*45° | 15°\*45° | 10°\*60°

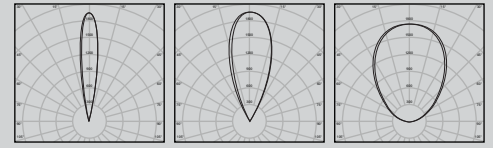


## Application

Line LR is a compact linear recessed light designed for precise, uniform illumination in modern architectural spaces. Its sleek, minimal profile integrates seamlessly into ceilings or walls, delivering clean lines and consistent light output. Ideal for accent, pathway, or ambient lighting, Line LR combines efficient LED technology with a refined design.

## Accessories

### Backbox



### Glare Control



Honey Comb

### IP68 Connectors



T-Connector



I-Connector

BR-LLR X R X X X X

12W-48W

Linear

Trim

SS plate

Narrow Medium Wide

RGB 6500K 4000K 3000K 2700K



