



LINE MR

LED Inground Linear Uplight




DALI | ON/OFF

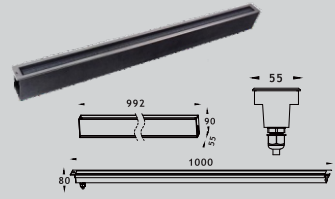

Wattage Range : **12W - 48W**
 Lumen Range : **700 - 2780lm**
 CCT : **2700K-6500K**
 CRI : **80/90**
 IP Rating : **IP67**
3 Step Macadam
 Material : **Die Cast Aluminium**
 Lifetime : **L70>50,000 hrs**
 Voltage : **DC24V | 220-240V**

Wattage	L	W	H	C
12W	275	55	80	55x90
24W	500	55	80	55x90
48W	1000	55	80	55x90

Optics : 15° | 20° | 30° | 45° | 60° | 10°*30° | 10°*45° | 15°*45° | 10°*60°

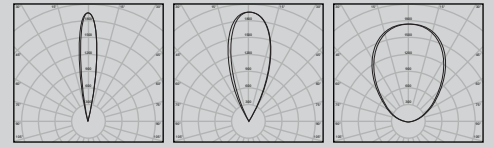


Application

Line MR Linear Recessed Uplighter is a slim, architectural lighting solution designed to create elegant upward illumination from floor or wall recesses. Its minimalist linear form blends seamlessly into the surface, providing smooth, uniform light that highlights walls, columns, and architectural features. Engineered with durable materials and efficient LED technology.

Accessories

Backbox

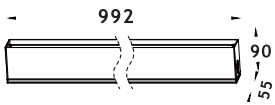

Glare Control



Honey Comb

IP68 Connectors



T-Connector



I-Connector

BR-LMR X R X X X X

12W-48W

Linear

Trim

SS plate

Narrow Medium Wide

RGB 6500K 4000K 3000K 2700K



