



LINE SR

LED Inground Linear Uplight




DALI | ON/OFF



Wattage Range : **9W - 36W**
 Lumen Range : **610 - 2450lm**
 CCT : **2700K-6500K**
 CRI : **80/90**
 IP Rating : **IP67**
3 Step Macadam
 Material : **Die Cast Aluminium**
 Lifetime : **L70>50,000 hrs**
 Voltage : **DC24V**

Wattage	L	W	H	C
9W	275	32	32	37.5x49
24W	500	32	32	37.5x49
36W	1000	32	32	37.5x49

Optics : 15° | 20° | 30° | 45° | 60° | 10°*30° | 10°*45° | 15°*45° | 10°*60°

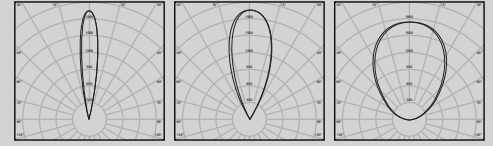


Application

Line SR Linear Recessed Uplighter is a slim, architectural lighting solution designed to create elegant upward illumination from floor or wall recesses. Its minimalist linear form blends seamlessly into the surface, providing smooth, uniform light that highlights walls, columns, and architectural features. Engineered with durable materials and efficient LED technology.

Accessories

Backbox



BR-LSR X R X X X X

9W-36W

Linear

Trim

SS plate

Narrow Medium Wide

RGB 6500K 4000K 3000K 2700K

Glare Control



Honey Comb

IP68 Connectors



T-Connector



I-Connector



