


# SPIRO

LED Surface Mounted Downlight




DALI | ON/OFF



Wattage Range : **10W - 50W**  
 Lumen Range : **1100 - 5500lm**  
 CCT : **2700K-4000K**  
 CRI : **80/90**  
 IP Rating : **IP20/IP65**  
**3** Step Macadam  
 Material : **Die Cast Aluminium**  
 Lifetime : **L70>50,000 hrs**  
 Voltage : **220-240V AC**

Wattage	D	H
10W	75	100
15W-20W	95	152
30W	115	152
40W	140	162
50W	170	182

Optics : 20° | 40° | 60°

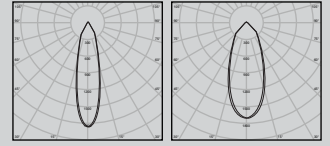


## Application

The Spiro Surface-Mounted Downlight features a sleek cylindrical design that delivers efficient, uniform LED illumination. Its minimal aesthetic and low-glare performance make it ideal for modern residential, commercial, and hospitality spaces. Durable and easy to install, Spiro provides a reliable lighting solution for both general and accent applications.

## Accessories

### Hanging Installation

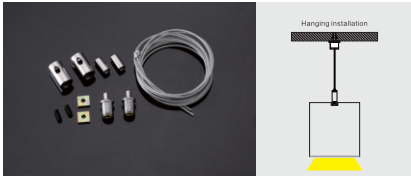

### Reflectors



White



Glossy Silver



Matt Black

### Glare Control



Honey Comb

BR-SPI X R S X X WX

10W-50W

Round

Surface

Custom Grey Black White

MB GS WH

Narrow Medium Wide

4000K 3000K 2700K







