


# SPIRO D

LED Surface Mounted Downlight




DALI | ON/OFF



Wattage Range : **15W - 50W**  
 Lumen Range : **1650 - 6000lm**  
 CCT : **2700K-4000K**  
 CRI : **80/90**  
 IP Rating : **IP20/IP65**  
**3** Step Macadam  
 Material : **Die Cast Aluminium**  
 Lifetime : **L70>50,000 hrs**  
 Voltage : **220-240V AC**

Wattage	D	H
15W	90	99
30W	120	118
50W	168	120




## Application

The Spiro D is a modern surface-mounted luminaire designed to provide soft, uniform illumination through its opal diffused cover. Its clean cylindrical form blends seamlessly into any interior, making it ideal for residential, commercial, and hospitality spaces. Offering easy installation and consistent visual comfort, Spiro Diffused is a reliable choice for general ambient lighting.

## Accessories

### Hanging Installation

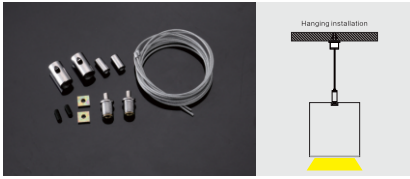

### Optics



Opal

**BR-SPD X R S X WHWX**

\_\_\_\_\_ **15W-50W** \_\_\_\_\_

\_\_\_\_\_ **Round** \_\_\_\_\_

\_\_\_\_\_ **Surface** \_\_\_\_\_

\_\_\_\_\_ **Custom Grey Black White** \_\_\_\_\_

\_\_\_\_\_ **WH** \_\_\_\_\_

\_\_\_\_\_ **Wide** \_\_\_\_\_

\_\_\_\_\_ **4000K 3000K 2700K** \_\_\_\_\_



