


SPIRO G

LED Surface Mounted Downlight




DALI | ON/OFF



Wattage Range : **15W - 50W**
 Lumen Range : **1650 - 6000lm**
 CCT : **2700K-4000K**
 CRI : **80/90**
 IP Rating : **IP20/IP65**
3 Step Macadam
 Material : **Die Cast Aluminium**
 Lifetime : **L70>50,000 hrs**
 Voltage : **220-240V AC**

Wattage	D	H
15W	90	99
30W	120	118
50W	168	120




Application

Spiro G Surface Mounted Downlight is a sleek, modern lighting fixture designed for surface mounting. It delivers high-quality, energy-efficient LED illumination with excellent glare control, making it ideal for commercial and residential spaces. Its durable construction and easy installation provide a versatile solution for general and accent lighting needs.

Accessories

Hanging Installation

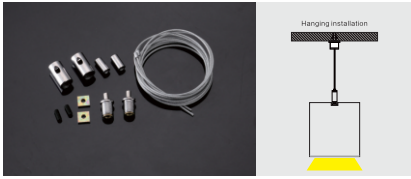

Glare Control



Honey Comb


Optics



Clear



Frosted



Prismatic

BR-SPG X R S X WHWX

15W-50W

Round

Surface

Custom Grey Black White

WH

Wide

4000K 3000K 2700K







