


Flexi MICRO

Flexible SMD Strip Light MICRO

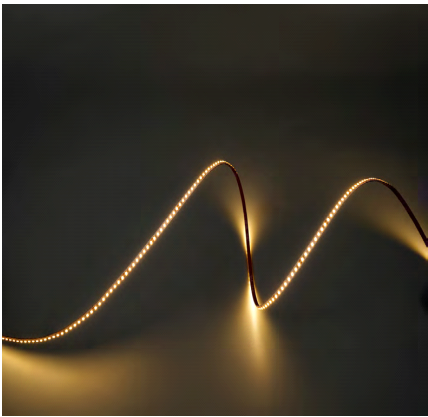

DESCRIPTION

Ultra-slim single-emission LED strip featuring a 4 mm PCB width, high CRI, and 2-Step MacAdam color consistency for smooth, uniform illumination. Ideal for narrow profiles, furniture, display, and architectural lighting applications.



Illumination Data

Color temprature:	2700K 3000K 4000K 6500K
Lumen per meter:	605LM 1200LM 1800LM
CRI	90 97
Beam angle	120° Flood

Physical Specification

Ingress protection (IP)	20 65 67
-------------------------	--------------

Electric Characteristics


Light source	LED Built in
LED type	SMD
Power per meter	4.8W 9.6 W 14.4 W
P.F	>0.9

Installation

Installation	Surface
Wiring	Product complete with electronic components

Certificate & Warranty


Certification	CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	5 years



Flexi MICRO

Flexible SMD Strip Light MICRO

Dimensions & Specs

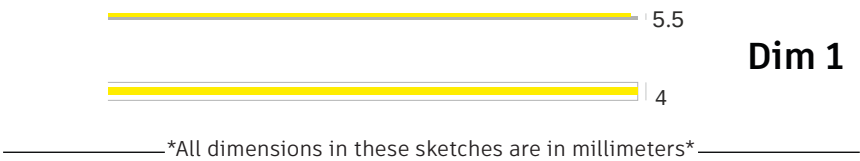

Dimnesions of luminaires

Dim	Width	Height	Reel Length
1	4mm	5.5mm	5 meter


Specs

Dimesnion (mm)	Wattage/meter (W/m)	lumen/meter (lm/m)
Dim1	4.8 watt 9.6 watt 14.4 watt	605 lm 1200 lm 1800 lm

All dimensions in this schedule table are in millimeters


BR-FLM X XX .97 XX F XX W - X

Product coding system

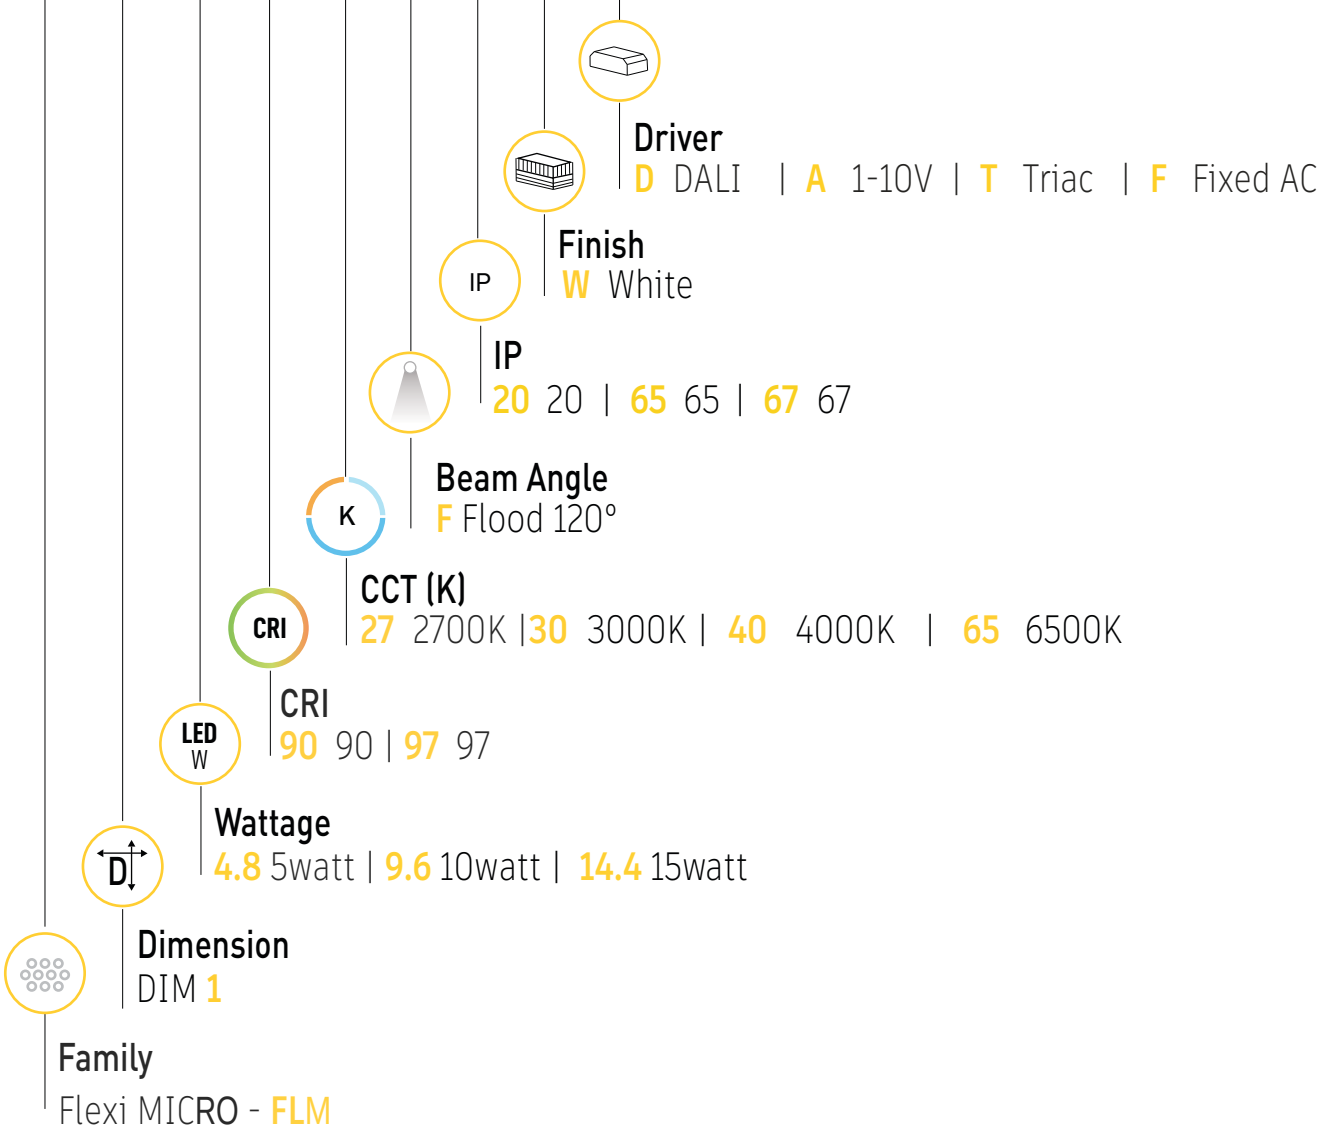

BR - FLM X XX.90 XX F XX W - X

Configure luminaire specs & send us the code for order confirmation



Flexi MICRO

Flexible SMD Strip Light MICRO

Optional Application



RGB




Dimmable

Brighton luminaires Map

- Brighton Luminaires Range
- Selected Luminaire Default placement





Indoor

Outdoor

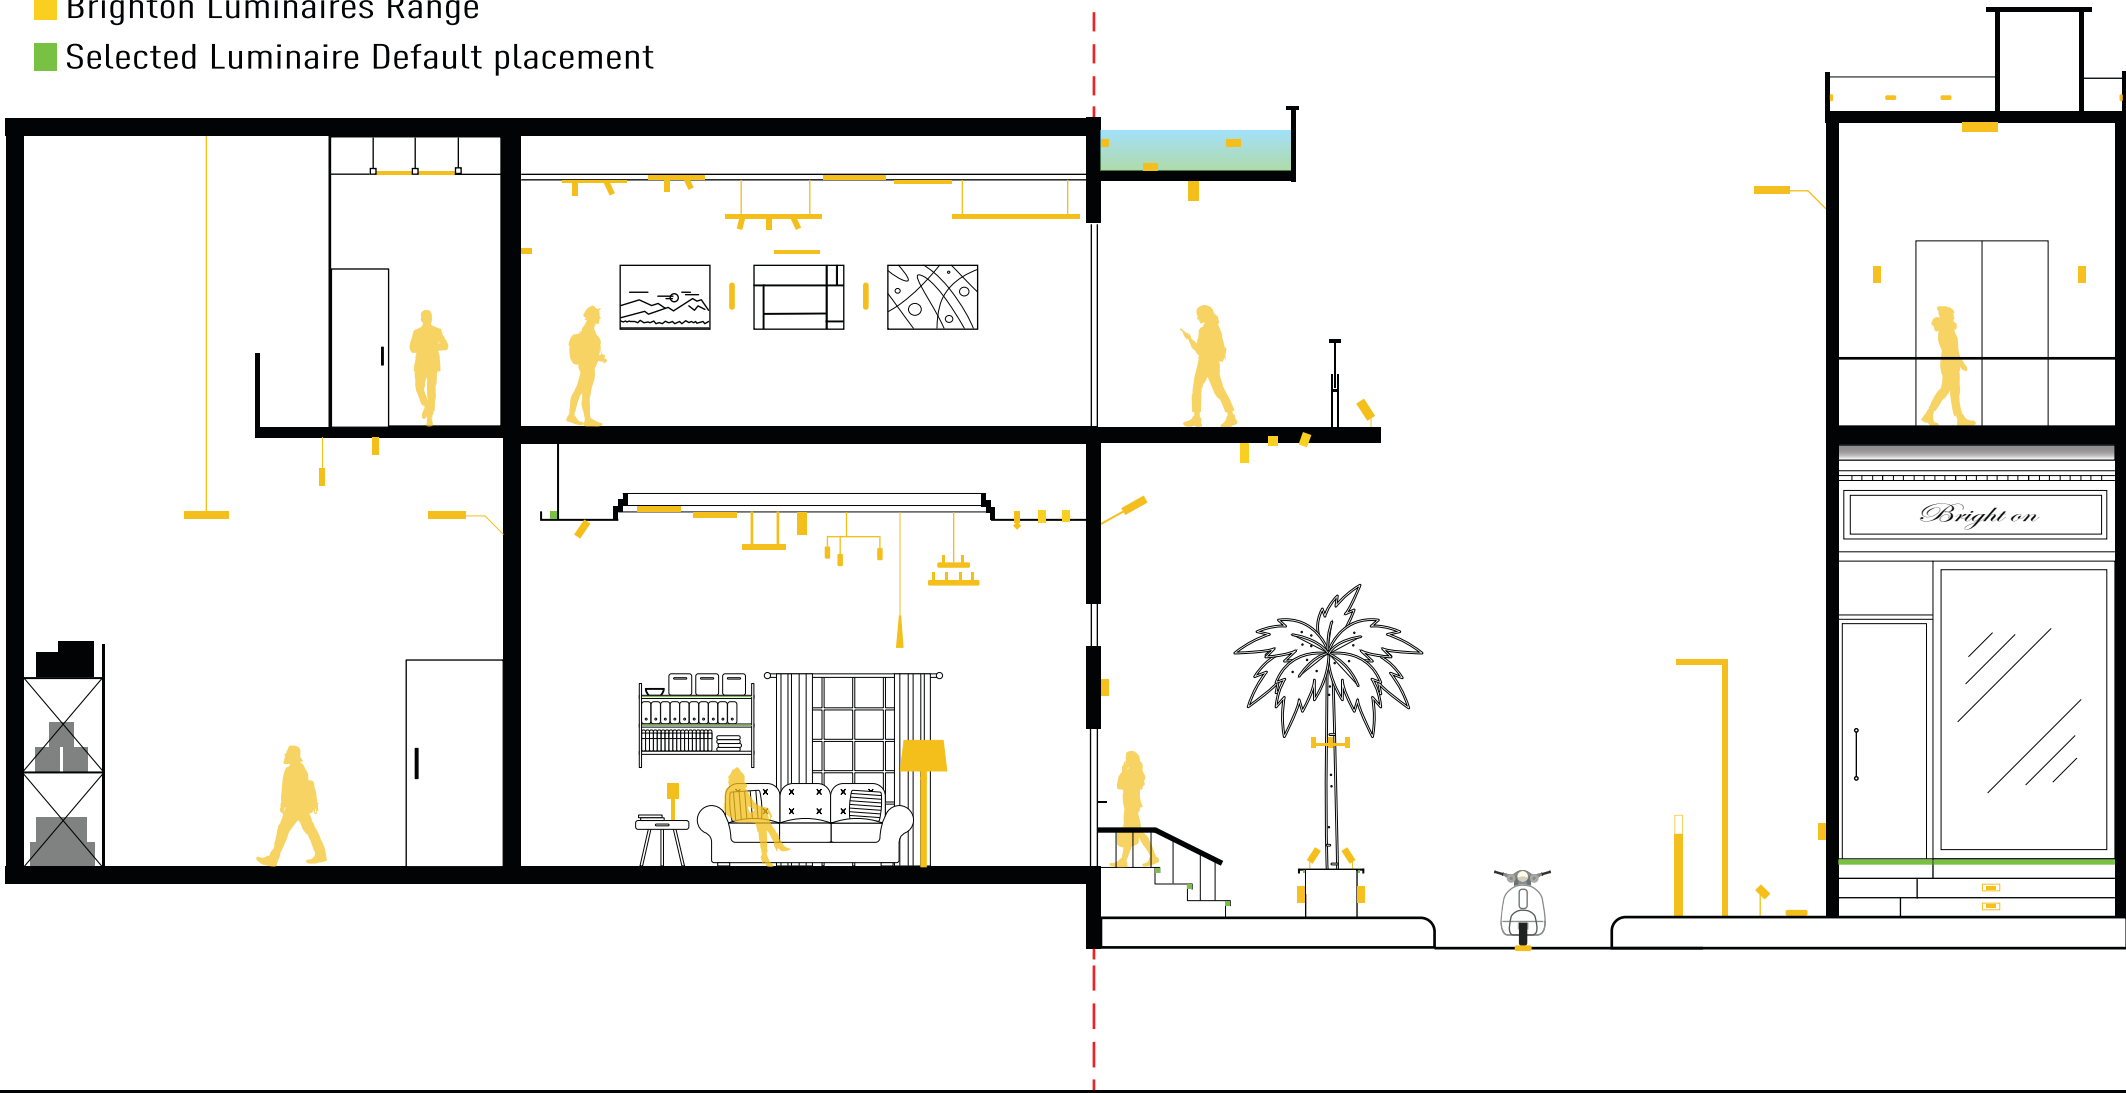


Accessories


01. Aluminium Profiles



AP-7

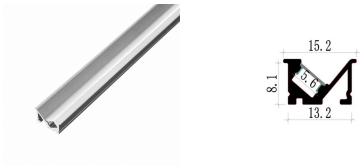

Beam Angle



Flexi MICRO

BRIGHTON

