



Loro D

Downlight



OSRAM
TRIDONIC VS LIGHTING SOLUTIONS

Driver

bridgelux

LED Chip

DESCRIPTION

LED ceiling recessed fixed down light featuring high light power and efficacy. Loro D is a product that is suitable to illuminate large spaces with different dimensions and wattage.

IP20

IP54



Illumination Data

Color temperature:	3000K 4000K 6500K
Lumen output:	1270LM 1575LM 1934 3150LM
CRI	80 90
Beam angle	90°
UGR	<19

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Polycarbonate
Optics	Clear
Ingress protection (IP)	20 54

Electric Characteristics

Light	LED Built in
Source LED	COB
Type Power	12W 15W 20W 30W
P.F	>0.9

Installation

Installation	Ceiling Recessed
Wiring	Product complete with electronic components

Luminaire Body Finish Color

White Ral 9003	
Black Ral 9005	
Grey Ral 9006	

Certificate & Warranty


Certification	CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Loro D

Downlight

Dimensions & Specs

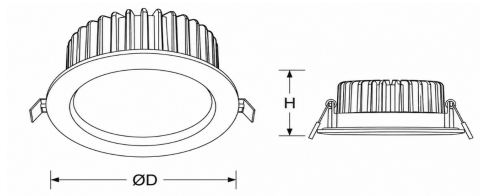

All dimensions in these sketches are in millimeters

Dimensions of luminaires

Dim	Ø Diameter	Height	Cutout
1	Ø 190mm	60mm	Ø175mm
2	Ø 190mm	60mm	Ø175mm
3	Ø 190mm	60mm	Ø175mm


All dimensions in this schedule table are in millimeters

Specs

Dimension (mm)	Wattage (W)	lumen (lm)
Dim1	12watt	1270lm
Dim2	15Watt	1575lm
Dim3	20Watt	1934lm
Dim4	30Watt	3150lm

BR-LOD X T R XX.XXX XXX X-X

Product coding system

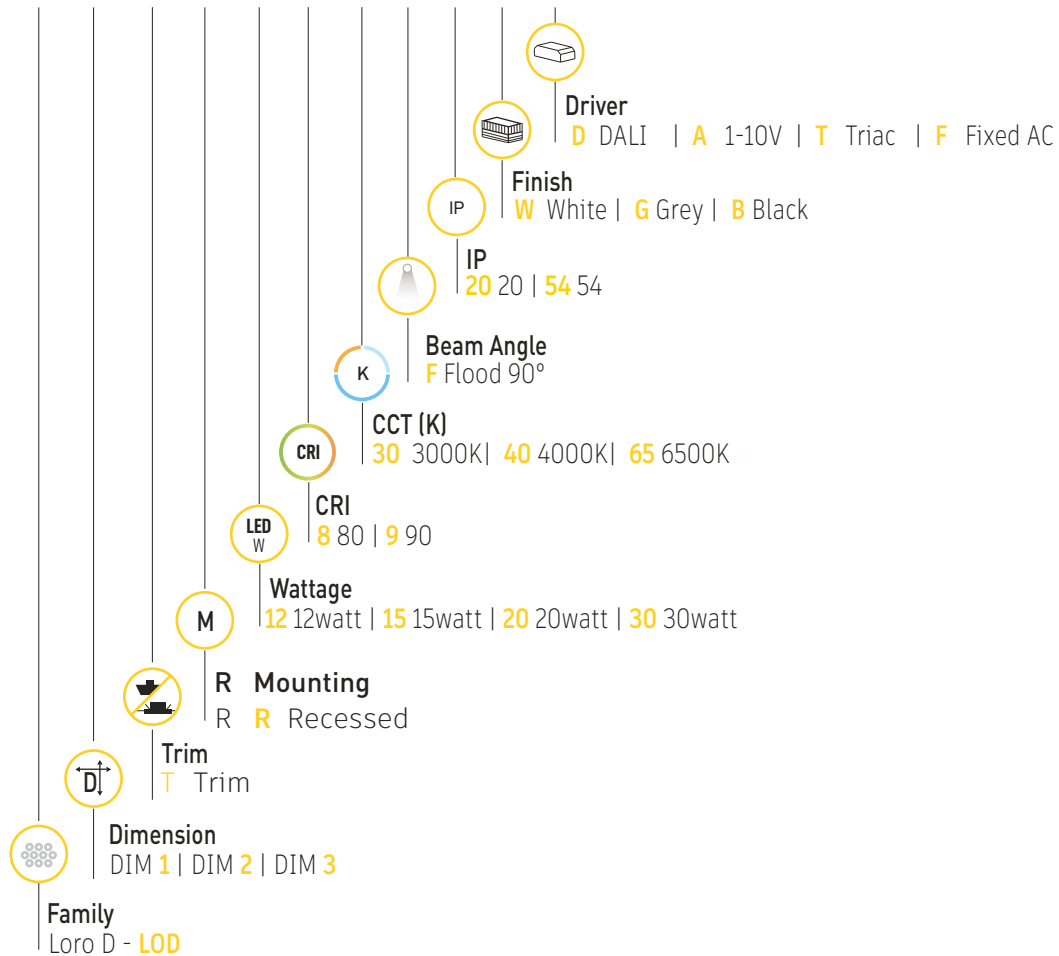

BR-LOD X T R XX.XXX XXX X-X

Configure luminaire specs & send us the code for order confirmation



Loro D

Downlight

Optional Application




Dimmable

Brighton Luminaires Map

■ Brighton Luminaires Range

■ Selected Luminaire Default placement

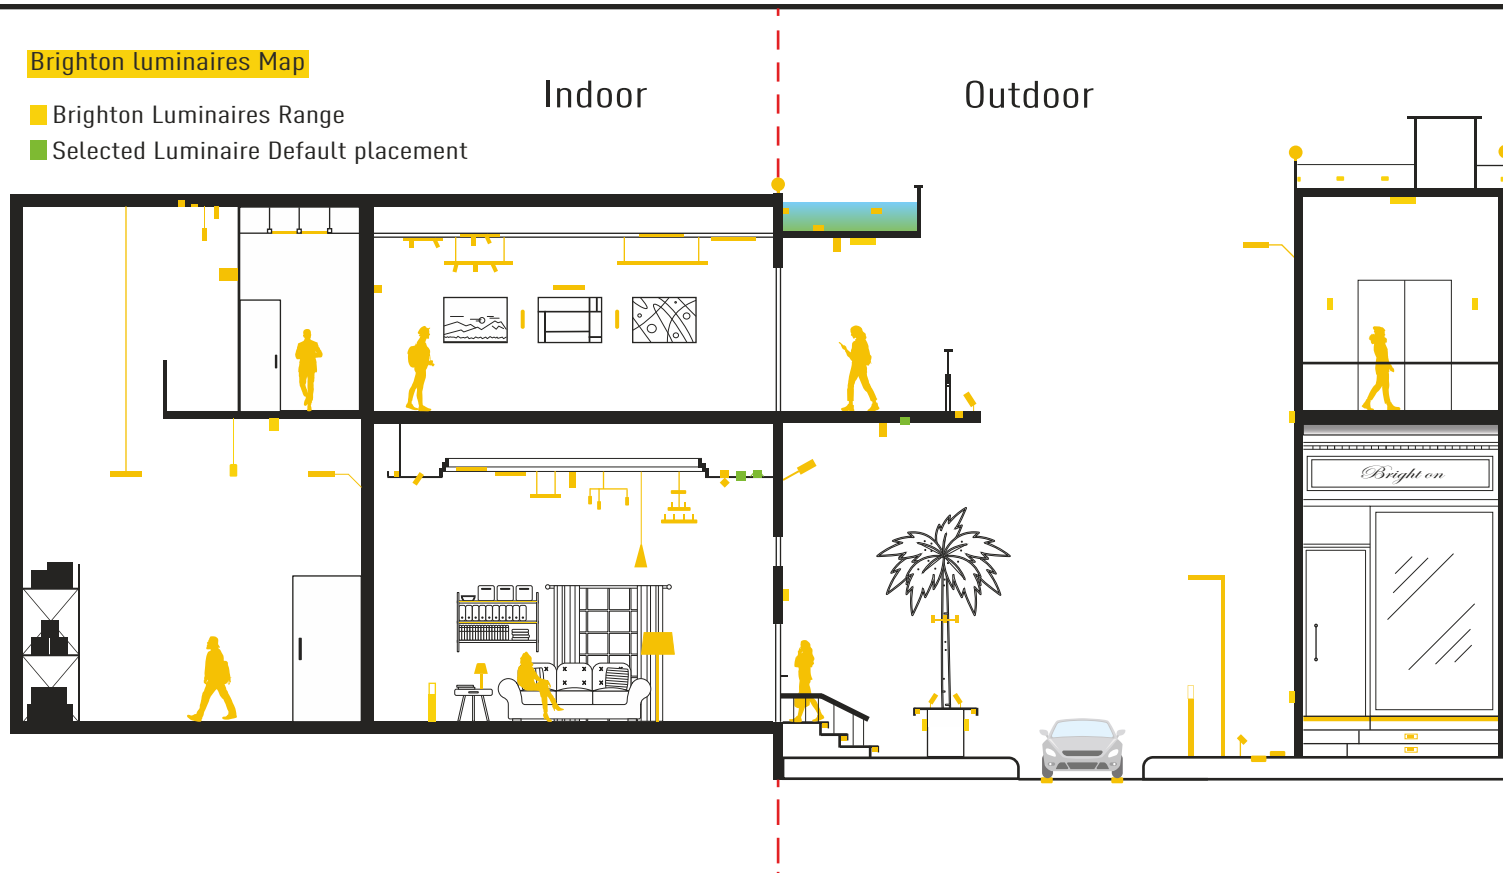

Accessories

Beam Angle

