




Regoe E

FIXED TRIM DOWNLIGHT

BRIGHTON

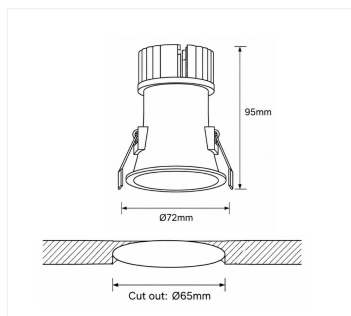

DESCRIPTION

Compact IP65 deep recessed LED downlight designed for architectural applications, Offering glare-controlled illumination with excellent colour rendering ($CRI \geq 90$) and high-quality light output.

OSRAM
TRIDONIC
Driver

bridgelux
CREE **NICHIA**
LED Chip

Die-cast aluminum

MAC
ADAM
<2


50,000 hrs

UGR
<19

CRI
>90

PRODUCT CODING SYSTEM

BR-REGEXX.9XXF65X-X

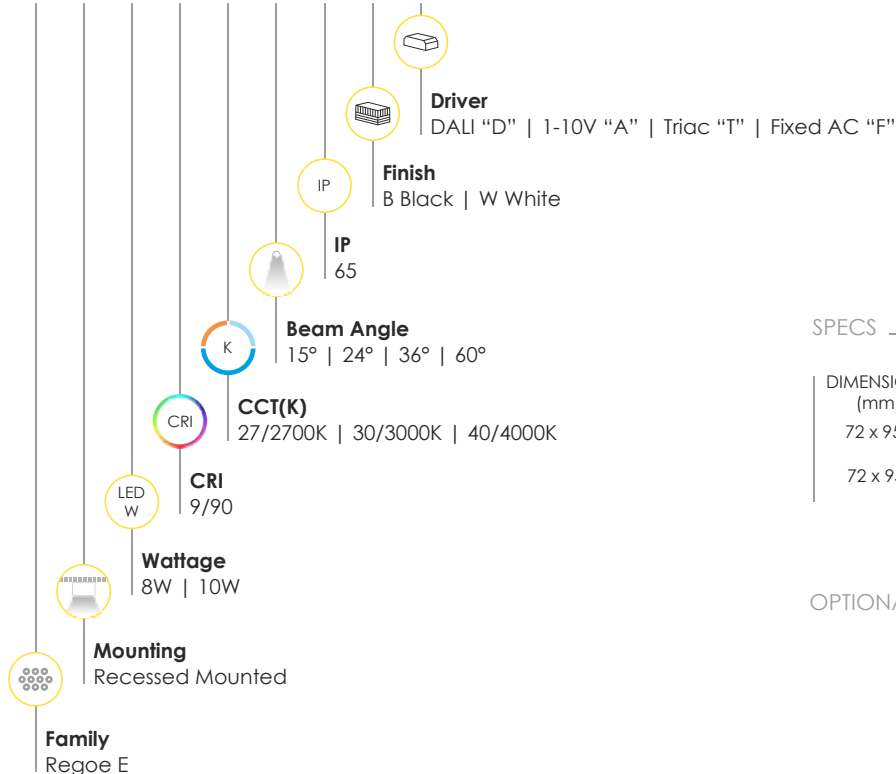

SPECS

DIMENSIONS (mm)	CUTOUT (mm)	WATTAGE (W)	LUMEN (lm)
72 x 95	65	8	511
72 x 95	65	10	750

OPTIONAL



HC-BK



Dimmable

BEAM ANGLE

