

Spin N

LED Adjustable Deep Recessed Downlight



DESCRIPTION

Spin N adjustable ceiling deep recessed downlight that is suitable to illuminate large spaces with different dimensions and wattages.

OSRAM
TRIDONIC VS LIGHTING
SOLUTIONS

Driver

bridgelux

LED Chip

IP 20

IP 54



Illumination Data

Color temperature:	2700K 3000K 4000K
Lumen output:	770 LM 921 LM
CRI	80 90
Beam angle	15° 24° 38° 50°
UGR	<19

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Polycarbonate
Optics	Clear
Ingress protection (IP)	20 / 54

Electric Characteristics

LightSource	LED Built in
LED Type	COB
Power	10W 12W
P.F	>0.9

Installation


Installation	Ceiling Recessed
Tilting angle	25°
Wiring	Product complete with electronic components

Luminaire Body Finish Color

White Ral 9003	
Black Ral 9005	

Certificate & Warranty


Certification	CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Spin N

LED Adjustable Deep Recessed Downlight

Dimensions & Specs

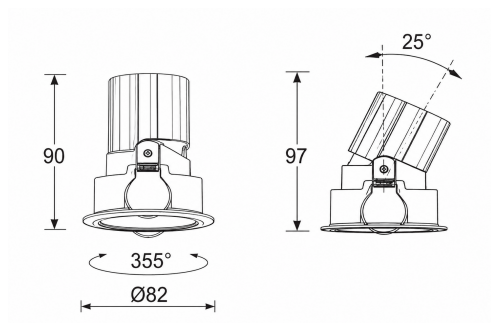

All dimensions in these sketches are in millimeters


Dimensions of luminaires

Dim	D	H	C
1	82	90	75
2	82	90	75

All dimensions in this schedule table are in millimeters

BR-SPN X T R XX.X XXXXX X-X

Product coding system

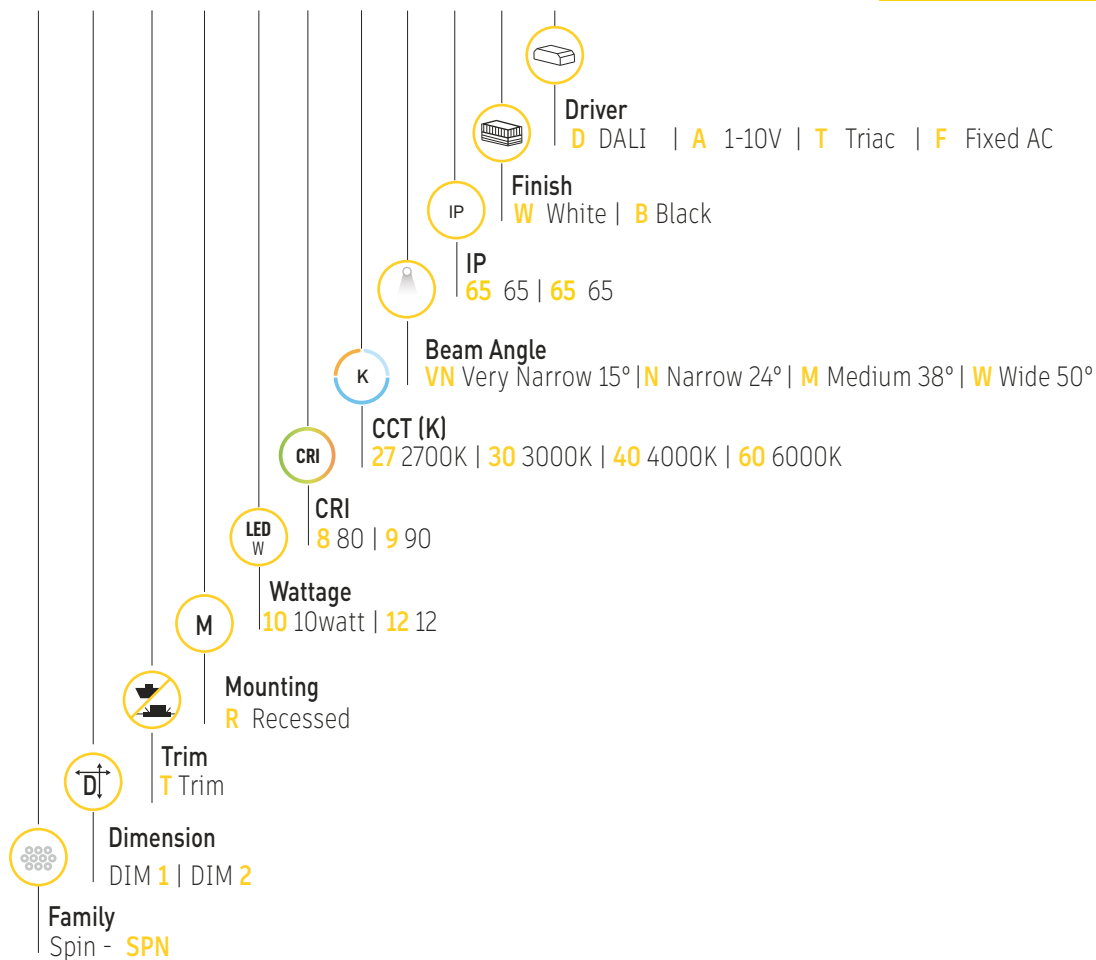

BR - SPN X T R XX.9 XXXXX X - X

Configure luminaire specs & send us the code for order confirmation



Spin N

LED Adjustable Deep Recessed Downlight

Optional Application




Dimmable

Brighton luminaires Map

■ Brighton Luminaires Range

■ Selected Luminaire Default placement


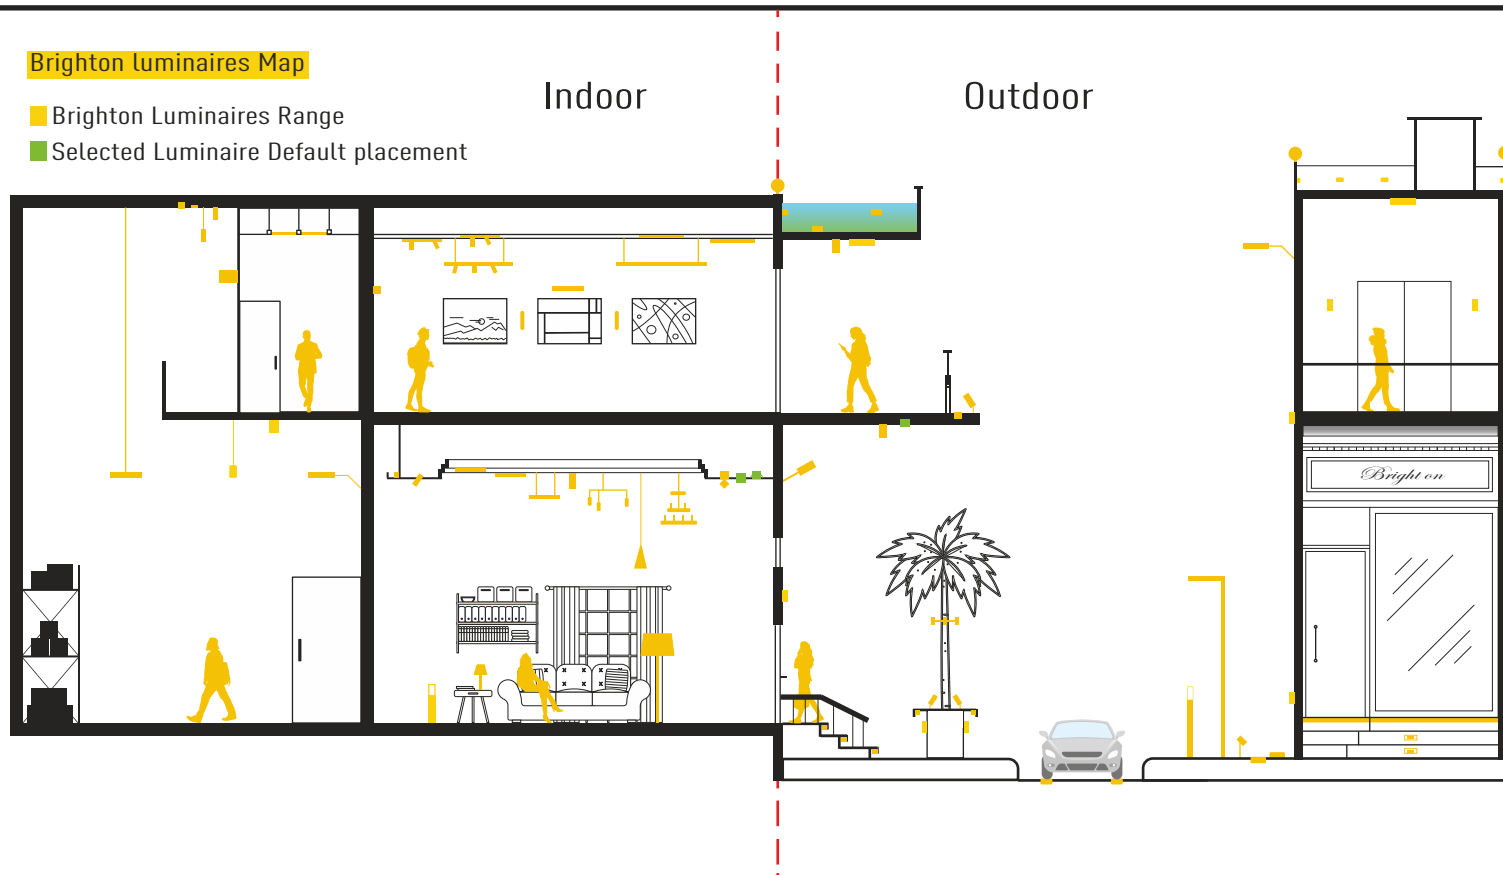


Accessories



HC-BK

Beam Angle

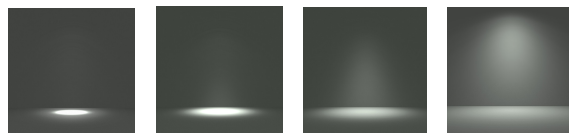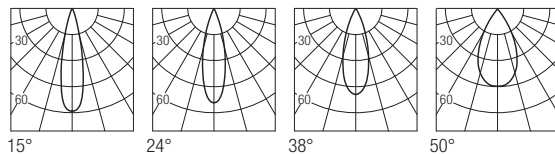



Spin N

BRIGHTON

