

Spin TA

LED Adjustable Deep Recessed Downlight



OSRAM
TRIDONIC VS LIGHTING SOLUTIONS

Driver

bridgelux

LED Chip

DESCRIPTION

Spin T adjustable ceiling deep recessed downlight that is suitable to illuminate large spaces with different dimensions and wattages.

IP 65



Illumination Data

Color temperature:	2700K 3000K 4000K
Lumen output:	850 LM 1105 LM
CRI	80 90
Beam angle	15° 24° 38° 50°
UGR	<19

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Polycarbonate
Optics	Clear
Ingress protection (IP)	65

Electric Characteristics

LightSource	LED Built in
LED Type	COB
Power	10W 13W
P.F	>0.9

Installation


Installation	Ceiling Recessed
Tilting angle	25°
Wiring	Product complete with electronic components

Luminaire Body Finish Color

White Ral 9003	
Black Ral 9005	

Certificate & Warranty


Certification	CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Spin TA

LED Adjustable Deep Recessed Downlight

Dimensions & Specs



All dimensions in these sketches are in millimeters


Dimensions of luminaires

Dim	D	H	C
1	65	90	58
2	65	90	58

All dimensions in this schedule table are in millimeters

BR-SPTA X T R XX.X XXXXX X-X

Product coding system

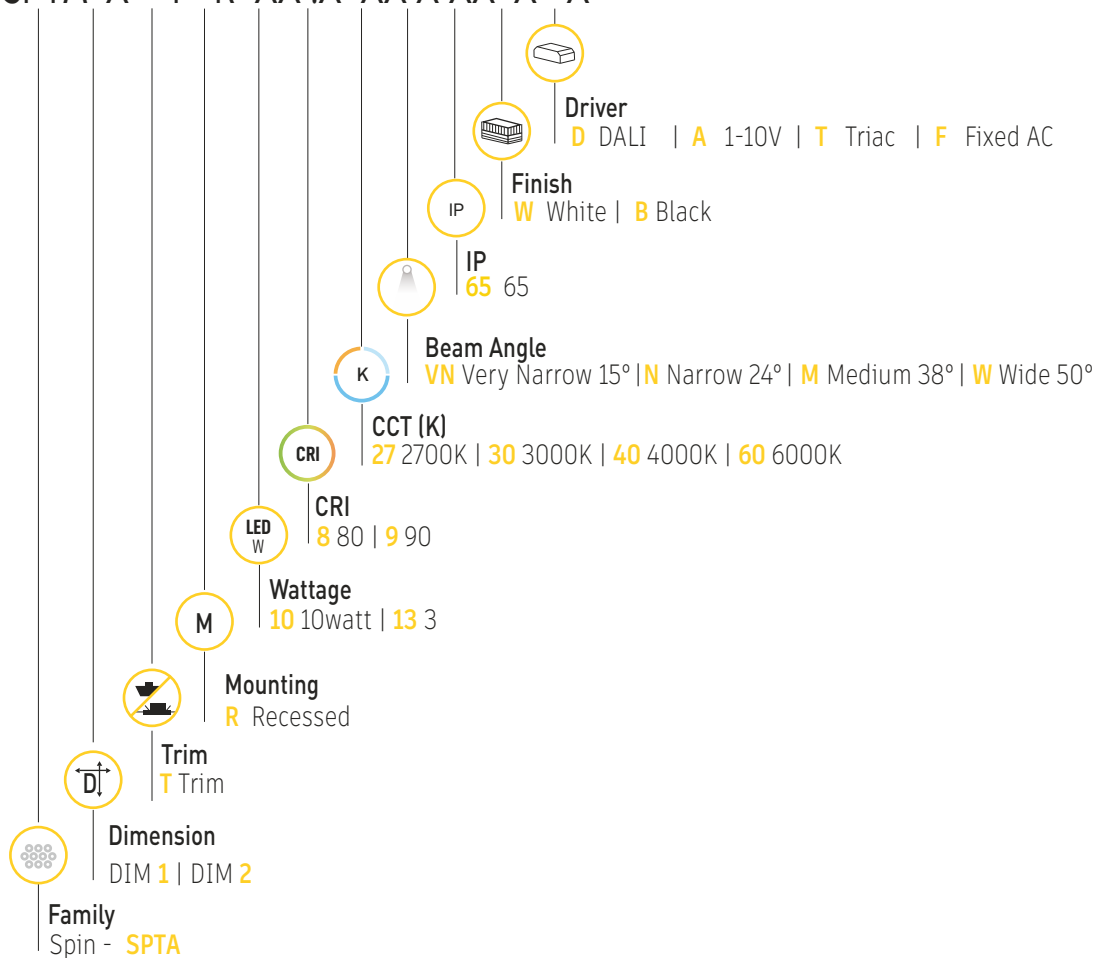

BR - SPTA X T R XX.9 XXXXX X-X

Configure luminaire specs & send us the code for order confirmation



Spin TA

LED Adjustable Deep Recessed Downlight

Optional Application




Dimmable


Brighton luminaires Map

■ Brighton Luminaires Range

■ Selected Luminaire Default placement


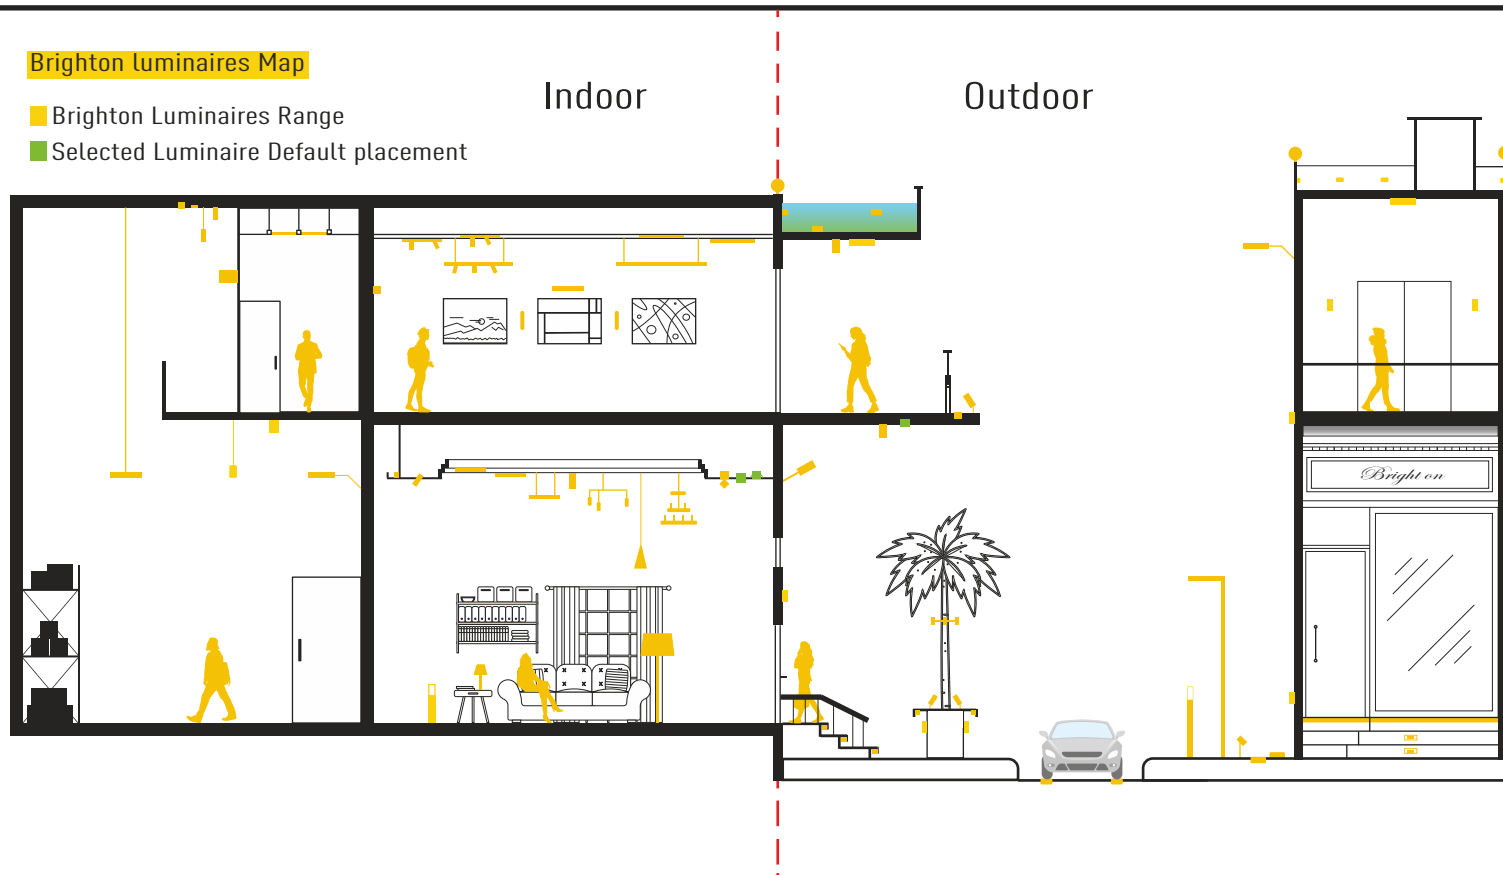


Accessories



HC-BK

Beam Angle

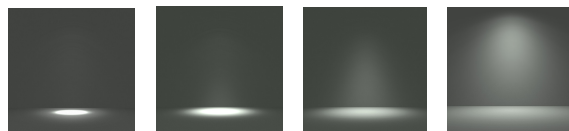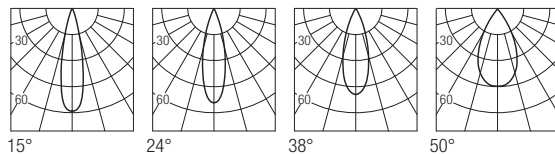



Spin TA

BRIGHTON

